

JC784 U.S. PTO
05/25/00

05-26-00

EK 483548 751 US

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. AUS000195US1

Assistant Commissioner for Patents
Washington, D.C. 20231

JC625 U.S. PTO
09/579256
05/25/00

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

UMESH G. KHATWANI and THEODORE JACK LONDON SHRADER

For: **METHOD AND SYSTEM FOR INCORPORATION OF GRAPHICAL PRINT
TECHNIQUES IN A WEB BROWSER**

Enclosed are also:

- ☒ 34 Pages of Specification including an Abstract
☒ 16 Pages of Claims
☒ 19 Sheet(s) of Drawings
☒ A Declaration and Power of Attorney
☒ Form PTO 1595 and assignment of the invention to IBM Corporation

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$690)
Total Claims	70	-20 =	50	X	\$ 18	=	\$900.00
Independent Claims	14	-3 =	11	X	\$ 78	=	\$858.00
Multiple Dependent Claims	0			X	\$260	=	\$
Total Filing Fee							= \$2,448.00

- ☒ Please charge \$2,448.00 to IBM Corporation, Deposit Account No. 09-0447.
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to IBM Corporation, Deposit Account No. 09-0447. A duplicate copy of this sheet is enclosed.
☒ Any additional filing fees required under 37CFR § 1.16.
☒ Any patent application processing fees under 37CFR § 1.17.

Respectfully,

Jeffrey S. LaBaw
Jeffrey S. LaBaw

Reg. No. 31,633

Intellectual Property Law Dept.

IBM Corporation

11400 Burnet Road 4054

Austin, Texas 75758

Telephone: (512) 823-0494

Docket No. AUS000195US1

**METHOD AND SYSTEM FOR INCORPORATION OF GRAPHICAL PRINT
TECHNIQUES IN A WEB BROWSER**

BACKGROUND OF THE INVENTION

5

1. Technical Field:

The present invention relates to an improved data processing system and, in particular, to a method and apparatus for managing world wide web documents in a data processing system. Still more particularly, the present invention provides a method and apparatus for performing actions on selected portions of web documents and displaying the location of page breaks within a web browser in a data processing system.

15

2. Description of Related Art:

The worldwide network of computers commonly known as the "Internet" has seen explosive growth in the last several years. Mainly, this growth has been fueled by the introduction and widespread use of so-called "web browsers," which enable simple graphical user interface-based access to network servers, which support documents formatted as so-called "web pages." These web pages are versatile and customized by authors. For example, web pages may mix text and graphic images. A web page also may include fonts of varying sizes. A browser is a program that is executed on a graphical user interface (GUI). The browser allows a user to seamlessly load documents from the Internet and display them by means of the GUI. These documents are commonly formatted using markup language protocols, such as hypertext markup language (HTML). Portions of text and images within a

00529266-03300

Docket No. AUS000195US1

document are delimited by indicators, which affect the
format for display. In HTML documents, the indicators
are referred to as tags. The browser gives some means of
viewing the contents of web pages (or nodes) and of
5 navigating from one web page to another.

The versatility and customization of web pages,
however, is sometimes an impediment to user generating
hard copies of the documents. Popular web browsers let
users print entire HTML documents. Often, web pages
10 contain information that the user may not want in a
printed copy of the document, such as advertising banners
or large pictures. Web pages may contain text, which is
the same color as the background and contains keywords to
improve the chances of being returned to users by a
15 search engine.

Currently, web browsers provide the ability to
select a portion of a document and to print only the
selected portion. However, the layout of a web page is
relative to the locations of the indicators (i.e. tags)
20 within the page. When only a portion is selected for
print, how the layout is affected is not known until the
portion is actually printed. For example, if a user
selects a portion of a document containing images, the
user does not know how the image will fall within
25 surrounding text until the portion is printed. To view
how a selected portion of a document will look when only
that portion is printed, a user must edit the document in
a two step process. First, the user must cut the
highlighted portion and paste it into a word processor or
30 HTML editor. Then, the pasted portion is printed from
the word processor.

Another difficulty in generating hard copies occurs

Docket No. AUS000195US1

with varying font sizes within a web page. Often, web pages contain text, which may be too big or too small to be printed practically.

For example, an author might make some text very
5 large to capture the attention of the viewer. Web pages may contain disclaimers, the text of which is too small to be printed legibly. Currently, web browsers do not provide the ability to select portions of a document and to increase or decrease the font size of the selected
10 portions. Again, to do such, a user must copy the web page to or open the web page in a word processor or HTML editor, select portions of the text by highlighting, change the font properties of the highlighted portions, and print the document from the word processor.

15 Web pages are authored for the purpose of display. As such, a single web page may correspond to several printed pages. This feature is frustrating when a user tries to generate a hard copy of a web page. The number of pages that will be printed and where the page breaks
20 will fall cannot be determined until the document is actually printed. A user may unwittingly print a document, which contains far more pages than desired. Some web browsers include a "print preview" function, which displays an image of how each page will appear when
25 printed. However, the images are often difficult to read and it is difficult to determine the subject matter on each page. The user must use "zoom" functions and navigate through the images to identify the layout of the pages. The prior art "print preview" function does not
30 allow the user to view page break indicators within a web document as it is displayed by the web browser.

Docket No. AUS000195US1

SUMMARY OF THE INVENTION

The present invention solves the problems associated with the prior art by creating a copy of the requested document and automatically performing minor editing functions on the copy in response to user commands. According to a first aspect of the present invention, when a user selects a portion of a first web document by highlighting the portion on the display and entering or selecting a command to print the selected portion, the web browser application creates a second web document comprising the header of the currently displayed document and the selected portion of the document. The web browser application then prints the second document. In doing so, the selected portion is printed and the important structural data of the HTML document is retained.

According to a second aspect of the present invention, when a user selects a portion of a first web document by highlighting the portion of the display and entering or selecting a command to change the font, the web browser application creates a copy of the current web document and inserts virtual font tags before and after the selected portion. In doing so, the user may alter the appearance of the web page using a simple command without opening and operating a complex word processing or editing application program.

According to a third aspect of the present invention, when a document is displayed, the web browser application identifies page break information. The web browser application then creates a copy of the web document and inserts virtual page break tags at the locations indicated by the page break information. It is

Docket No. AUS000195US1

then the copy of the document that is displayed with the
page break locations indicated on the display.

2025 RELEASE UNDER E.O. 14176

Docket No. AUS000195US1

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

10 **Figure 1** depicts a pictorial representation of a distributed data processing system in which the present invention may be implemented;

15 **Figure 2** is a block diagram illustrating a data processing system in which the present invention may be implemented;

Figure 3 is a block diagram illustrating the software organization within the data processing system of the present invention;

20 **Figure 4** is a block diagram of a browser program structure in accordance with a preferred embodiment of the present invention;

Figure 5 is an example screen of display of a browser program in which the present invention may be implemented;

25 **Figure 6** depicts a document history and a current document to be processed by the present invention;

Figures 7A and 7B are flowcharts which illustrate the overall process of the present invention;

30 **Figure 8** is an example screen of display of a browser program in which a portion of the document is selected according to a first embodiment of the present invention;

Docket No. AUS000195US1

Figure 9 depicts a document history and an exemplary current document including a selected portion of a document in accordance with a preferred embodiment of the present invention;

5 **Figure 10** is an example screen of display of a browser program presenting a selected portion of a document according to a preferred embodiment of the present invention;

Figures 11A and 11B are flowcharts, which
10 illustrates a process for presenting a selected portion of a web page according to a preferred embodiment of the present invention;

Figure 12 is an example screen of display of a browser program in which a portion of the document is
15 selected according to a preferred embodiment of the present invention;

Figure 13 depicts a document history and a current document having a modified font attribute for a selected portion of a document in accordance with a preferred
20 embodiment of the present invention;

Figure 14 is an example screen of display of a browser program presenting a document with a modified font attribute for a selected portion of a document according to a second embodiment of the present
25 invention;

Figures 15A and 15B are flowcharts, which illustrates a process for changing a font size of a selected portion of a web page according to a preferred embodiment of the present invention;

30 **Figure 16** depicts a document history and a current document including a page break indicator in accordance with a preferred embodiment of the present invention;

Docket No. AUS000195US1

Figure 17 is an example screen of display of a browser program presenting a document with a page break indicator according to a preferred embodiment of the present invention; and,

- 5 **Figures 18A and 18B** are flowcharts, which illustrate a process for displaying a web page with page break indicators, according to a preferred embodiment of the present invention.

00570236 05000

Docket No. AUS000195US1

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference now to the figures, **Figure 1** depicts a pictorial representation of a distributed data processing system in which the present invention may be implemented. Distributed data processing system **100** is a network of computers in which the present invention may be implemented. Distributed data processing system **100** contains a network **102**, which is the medium used to provide communications links between various devices and computers connected together within distributed data processing system **100**. Network **102** may include permanent connections, such as wire or fiber optic cables, or temporary connections made through telephone connections.

In the depicted example, a server **104** is connected to network **102** along with storage unit **106**. In addition, clients **108**, **110**, and **112** also are connected to network **102**. These clients **108**, **110**, and **112** may be, for example, personal computers or network computers. Client **112** is shown to be connected to printer **114**. For purposes of this application, a network computer is any computer, coupled to a network, which receives a program or other application from another computer coupled to the network. In the depicted example, server **104** provides data, such as web pages to clients **108-112**. The web pages may be stored in storage unit **106** or at the server **104**. Clients **108**, **110**, and **112** are clients to server **104**. Distributed data processing system **100** may include additional servers, clients, and other devices not shown.

In the depicted example, distributed data processing system **100** is the Internet with network **102** representing

Docket No. AUS000195US1

a worldwide collection of networks and gateways that use the TCP/IP suite of protocols to communicate with one another. At the heart of the Internet is a backbone of high-speed data communication lines between major nodes
5 or host computers, consisting of thousands of commercial, government, educational and other computer systems that route data and messages. Of course, distributed data processing system **100** also may be implemented as a number of different types of networks, such as for example, an
10 intranet, a local area network (LAN), or a wide area network (WAN). **Figure 1** is intended as an example, and not as an architectural limitation for the present invention.

With reference now to **Figure 2**, a block diagram is
15 shown illustrating a data processing system in which the present invention may be implemented. Data processing system **200** is an example of a client computer. Data processing system **200** employs a peripheral component interconnect (PCI) local bus architecture. Although the
20 depicted example employs a PCI bus, other bus architectures such as Accelerated Graphics Port (AGP) and Industry Standard Architecture (ISA) may be used. Processor **202** and main memory **204** are connected to PCI local bus **206** through PCI bridge **208**. PCI bridge **208**
25 also may include an integrated memory controller and cache memory for processor **202**. Additional connections to PCI local bus **206** may be made through direct component interconnection or through add-in boards. In the depicted example, local area network (LAN) adapter **210**,
30 SCSI host bus adapter **212**, and expansion bus interface **214** are connected to PCI local bus **206** by direct component connection. In contrast, audio adapter **216**,

Docket No. AUS000195US1

graphics adapter **218**, and audio/video adapter **219** are connected to PCI local bus **206** by add-in boards inserted into expansion slots. Expansion bus interface **214** provides a connection for a keyboard and mouse adapter **220**, modem **222**, and additional memory **224**. Small computer system interface (SCSI) host bus adapter **212** provides a connection for hard disk drive **226**, tape drive **228**, and CD-ROM drive **230**. Typical PCI local bus implementations will support three or four PCI expansion slots or add-in connectors.

An operating system runs on processor **202** and is used to coordinate and provide control of various components within data processing system **200** in **Figure 2**. The operating system may be a commercially available operating system, such as Windows 2000, which is available from Microsoft Corporation. An object oriented programming system such as Java may run in conjunction with the operating system and provides calls to the operating system from Java programs or applications executing on data processing system **200**. "Java" is a trademark of Sun Microsystems, Inc. Instructions for the operating system, the object-oriented operating system, and applications or programs are located on storage devices, such as hard disk drive **226**, and may be loaded into main memory **204** for execution by processor **202**.

Those of ordinary skill in the art will appreciate that the hardware in **Figure 2** may vary depending on the implementation. Other internal hardware or peripheral devices, such as flash ROM (or equivalent nonvolatile memory) or optical disk drives and the like, may be used in addition to or in place of the hardware depicted in **Figure 2**. Also, the processes of the present invention

Docket No. AUS000195US1

may be applied to a multiprocessor data processing system.

For example, data processing system **200**, if optionally configured as a network computer, may not include SCSI host bus adapter **212**, hard disk drive **226**, tape drive **228**, and CD-ROM **230**, as noted by dotted line **232** in **Figure 2** denoting optional inclusion. In that case, the computer, to be properly called a client computer, must include some type of network communication interface, such as LAN adapter **210**, modem **222**, or the like. As another example, data processing system **200** may be a stand-alone system configured to be bootable without relying on some type of network communication interface, whether or not data processing system **200** comprises some type of network communication interface. As a further example, data processing system **200** may be a Personal Digital Assistant (PDA) device, which is configured with ROM and/or flash ROM in order to provide non-volatile memory for storing operating system files and/or user-generated data.

The depicted example in **Figure 2** and examples described herein are not meant to imply architectural limitations. For example, data processing system **200** also may be a notebook computer or hand held computer in addition to taking the form of a PDA. Data processing system **200** also may be a kiosk or a Web appliance.

With reference now to **Figure 3**, a block diagram is shown illustrating the software organization within the data processing system in which the present invention may be implemented. The organization shown may be embodied within data processing system **200** as an example of a client computer. Operating system **302** communicates with

Docket No. AUS000195US1

applications **304**, **306** and web browser **308**. Operating system communicates with hardware **320** directly or through input/output (I/O) manager **310**. I/O manager **310** includes device driver **312**, printer driver **314**, and network
5 drivers **316**. Device driver **312** may be a software driver for a printer or other device, such as a display, fax modem, sound card, etc. The operating system receives input from the user through hardware **320**. Web browser **308** sends information to and receives information from
10 the Internet by communicating with network drivers **316** through I/O manager **310**. Applications, including web browser **308**, send documents to a printer, such as printer **114**, through printer driver **314**.

Turning next to **Figure 4**, a block diagram of a
15 browser program **400** is depicted in accordance with a preferred embodiment of the present invention. A browser is an application used to navigate or view information or data in a distributed database, such as the Internet or the World Wide Web. The browser may be located on
20 storage devices, such as hard disk drive **226**, and may be loaded into main memory **204** for execution by processor **202**, in **Figure 2**. Furthermore, browser **400** may be implemented as browser **308** in **Figure 3**.

In this example, browser **400** includes a user
25 interface **410**, which is a graphical user interface (GUI) that allows the user to interface or communicate with browser **400**. This interface provides for selection of various functions through menus and allows for. For example, a menu may allow a user to perform various
30 functions, such as saving a file, opening a new window, displaying a history, and entering a uniform resource

Docket No. AUS000195US1

locator (URL). Navigation allows for a user to navigate various pages and to select web sites for viewing. For example, navigation may allow a user to see a previous page or a subsequent page relative to the present page

5 Communications **420** is the mechanism with which browser **400** receives documents and other resources from a network such as the Internet. Further, communications **420** is used to send or upload documents and resources onto a network. In the depicted example, communication **420** uses
10 HTTP. Other protocols may be used depending on the implementation.

Browser **400** also includes document creation and editing **430**. In response to instruction by the user, document creation and editing **430** creates a new document
15 for presentation to the user. The specific features of presentation of a selected portion of a document, presentation of a document with modified font attribute for a selected portion, and presentation of a document with page break indicators will be described in more
20 detail below. However, document creation and editing **430** may include other features which allow a user to customized an existing web page.

Browser **400** is presented as an example of a browser program in which the present invention may be embodied.
25 Browser **400** is not meant to imply architectural limitations to the present invention. Presently available browsers may include additional functions not shown or may omit functions shown in browser **400**. A browser may be any application that is used to search for and display
30 content on a distributed data processing system. Browser **400** may be implemented using known browser applications, such as Netscape Navigator or Microsoft Internet

Docket No. AUS000195US1

Explorer. Netscape Navigator is available from Netscape Communications Corporation while Microsoft Internet Explorer is available from Microsoft Corporation, Redmond, Washington.

5 The present invention may be implemented by modifying the code of an existing web browser or by means of a plug-in application or other applications to be used integrally within the web browser. Known plug-in applications and other applications are configured within
10 the web browser by creating associations with particular file types or by creating additional menu commands, buttons on toolbars, etc. Calls are made to the applications by the web browser and the applications are run within the browser itself. For example, images,
15 streaming audio and video, and other content such as streaming stock quotes may be presented within the web browser by supporting applications.

 An example of a screen of display of a web browser is shown in **Figure 5**. The screen comprises window **500**,
20 including a title bar **502**, which may display the title of the document and the name of the browser program. Title bar **502** also includes a control box **504**, which produces a drop-down menu when selected with the mouse, and "minimize" **506**, "maximize" or "restore" **508**, and "close"
25 **510** buttons. The "minimize" and "maximize" or "restore" buttons **506** and **508** determine the manner in which the program window is displayed. In this example, the "close" button **510** produces an "exit" command when selected. The drop-down menu produced by selecting
30 control box **504** includes commands corresponding to "minimize," "maximize" or "restore," and "close" buttons, as well as "move" and "resize" commands.

Docket No. AUS000195US1

Browser program window **500** also includes a menu bar **512**, navigation toolbar **514**, and address toolbar **516**. Menus to be selected from menu bar **512** include "File", "Edit", "View", "Tools", "Window", and "Help." However, menu bar **512** may include fewer or more menus, as understood by a person of ordinary skill in the art. Navigation toolbar **514** is a series of buttons, which produce navigational commands when selected. The navigation toolbar buttons include "Back", "Forward", "Stop", "Reload", and "Home." Address toolbar **516** includes a text entry field in which a new URL may be entered for retrieval. Browser program window **500** also includes a display area **518**.

Also shown in **Figure 5** is an example HTML document displayed in display area **518**. The example document includes an advertising banner **550**, a string of text with a large font size **560**, and an image **570**. The operation of the present invention will be described with respect to the example document; however, it will be understood that the present invention may be implemented on any markup language document.

As shown in **Figure 6**, the browser navigates within document history **602**, which includes current document **604**. The current document **604**, which is displayed in **Figure 5**, is an HTML document. Current document **604** is delimited by tags **<HTML>** and **</HTML>**. Document **604** also includes a header **606**, delimited by tags **<HEAD>** and **</HEAD>**, and a body **608**, delimited by tags **<BODY>** and **</BODY>**. The header includes a title, delimited by tags **<TITLE>** and **</TITLE>**, which is shown in title bar **502** in **Figure 5**. The body makes up the displayable document

Docket No. AUS000195US1

shown in display area **518** in **Figure 5**. The HTML document described herein is exemplary. A person of ordinary skill in the art would recognize that the present invention may be implemented or modified to process other
5 known HTML tags and structures, such as tables and java scripts.

With reference now to **Figures 7A and 7B**, a flowchart of the general operation of a web browser is depicted according to a preferred embodiment of the present
10 invention. The present invention may be implemented in browser **500** shown in **Figure 5**, wherein browser **500** provides the functionality of a conventional web browser. However, the web browser of the present invention allows the user to view and print a selected portion of a web
15 page, to change the font size of a selected portion of a web page, and to display page breaks within a web page as they will occur when the web page is printed.

The operation of the program begins (step **700**) and receives a URL of a document to be displayed (step **705**).
20 When the browser application is initially opened, the URL received is the home page designated by the user to be loaded at startup. A URL may also be received by selection of a "favorite" or "bookmark", selection of the "Back", "Forward", or "Home" buttons, direct entry into
25 an address bar, such as address bar **516**, or by other methods, such as links from other applications. When the URL is received, the document is retrieved from the server (step **710**) and the document is displayed (step **715**).

30 Next, the process determines whether a "reload" instruction has been received (step **720**) by selection of the "reload" button, selection through a menu, or by a

Docket No. AUS000195US1

keyboard command. If a "reload" instruction has been received, the process returns to step **710** to retrieve the document corresponding to the current URL in the document history. If a "reload" instruction has not been received

5 in step **720**, a determination is made whether a new URL has been selected or entered (step **725**). If a new URL has been selected or entered, then the process returns to step **705** to receive the URL for document retrieval and display. If a new URL has not been selected or entered

10 in step **720**, a determination is made whether an action is requested (step **730**). In the depicted example, an action may be any non-navigational command issued by the user, such as "minimize" or a help command. If an action is not requested, the process returns to step **720** to repeat

15 determination as to whether a "reload" instruction, a new URL, or an action request is received.

With reference again to step **730**, if an action is requested, a determination is then made whether a portion of the document has been selected (step **735**). Typically,

20 a portion of a document is highlighted for selection by operation of a mouse; however, other methods of selecting a portion of a document, such as by means of cursor control keys, menu commands, etc. will be readily apparent to a person of ordinary skill in the art.

25 Commands and instructions are issued to the program by the user through the graphical user interface, i.e. the buttons and menus, keystrokes, and/or a command-line interface, as are known in the art. Other means for allowing a user to issue commands will be readily

30 apparent to a person of ordinary skill in the art. In a preferred embodiment, the right-click capabilities within the Windows operating system will be used to present

Docket No. AUS000195US1

additional menu choices, such as "Print Selected," "Display Selected," "Increase Font," "Decrease Font," and "Display Page Breaks" when a portion of the document has been selected by highlighting.

5 If a portion of the document has been selected, a determination is made whether an instruction to present the selected portion of the document (step **740**). If an instruction to present the selected portion of the document is received, the program executes the
10 instruction according to a first aspect of the present invention (step **745**) and returns to step **720** to determine whether a "reload" instruction has been received. The detailed operation of the presentation of the selected portion of the document according to the first aspect of
15 the present invention will be described in more detail below with respect to **Figures 11A and 11B**.

Referring back to step **740**, if an instruction to present the selected portion of the document is not received, a determination is made as to whether an
20 instruction to change the font of the selected portion (step **750**). If an instruction to change the font of the selected portion is received, the program executes the instruction according to a second aspect of the present invention (step **755**) and returns to step **720** to determine
25 whether a "reload" instruction has been received. The detailed operation of the change of the font of the selected portion of the document according to the second aspect of the present invention will be described in more detail below with respect to **Figures 15A and 15B**.

30 With reference again to step **735**, if a portion of the document has not been selected, a determination is made whether an "exit" instruction has been received

Docket No. AUS000195US1

(step 760). If an "exit" instruction has been received, operation ends (step 765) and the program closes. If in step 760 an "exit" instruction has not been received, a determination is made whether an instruction has been received to display the document with page break indicators (step 770).

If an instruction has been received to display the document with page break indicators, the program executes the instruction (step 775) according to a third aspect of the invention and returns to step 720 to determine whether a "reload" instruction has been received. The detailed operation of the display of the document with page break indicators according to the third aspect of the present invention will be described in more detail below with respect to **Figures 18A and 18B**.

Referring again to step 770, if an instruction has not been received to display the document with page break indicators, the program proceeds to perform any other action, as with a conventional web browser (step 780). The process then returns to step 720 to determine whether a "reload" instruction has been received. Other actions to be performed may include "minimize" or "save", as mentioned above; however, such actions are not the focus of the current invention and will not be described in further detail.

In accordance with a first aspect of the invention, a user may determine a portion of a document, which is desired for printing. However, due to the complexity of some web documents, it may be difficult for the user to visualize or predict the appearance of the printed output. Therefore, the mechanism of the present invention solves this problem by allowing the user to

Docket No. AUS000195US1

instruct the web browser to create a document, which contains only the selected portion, and to display the newly created document for subsequent printing.

Turning now to **Figure 8**, a screen of display is shown in which a portion of the document has been selected, as shown by highlighted portion **802**. As shown in **Figure 9**, the newly created document becomes the current document **904** in document history **902**. According to one embodiment of the present invention, the newly created document replaces the current document in the document history **902**, but retains the URL identifier. When the user is finished viewing and/or printing the newly created document, the original document may be recovered by issuing a "refresh" or "reload" command.

According to an alternate embodiment, the newly created document becomes the current document **904** in the document history **902** and the URL identifier points to the location of the document file in storage, such as a temporary file name. The original document then becomes the previous document **906** in the document history **902**. When the user is finished viewing and/or printing the newly created document, the original document may be recovered by issuing a "back" command.

As seen in the example shown in **Figure 8**, the selected portion begins with an image, denoted in the HTML document in **Figure 6** as follows:

```
<IMG SRC="Image1.jpg" ALIGN="center" Width=45 HEIGHT=45>
```

The selected portion ends with the text "Display a virtual page break indicator inline with the web documents". Therefore, the new document **904** is created by copying the header and any trailer information from the current document **604**. The **<BODY>** and **</BODY>** tags

Docket No. AUS000195US1

also are automatically copied from the current document to the newly created document. In the current example, the **<BODY>** tag includes the following attributes:

TEXT="#000000" LINK="#0000ff" VLINK="#800080". All

5 images and text included in the selected portion, as well as any tags which effect any part of the selected portion, are also copied to the newly created document and inserted between the **<BODY>** and **</BODY>** tags. For example, as seen in **Figure 6**, the image marking the
10 beginning of the selected portion is nested within **<P>** and **</P>** tags. Therefore, the beginning **<P>** tag is included in the newly created document shown in **Figure 9**.

In the example shown in **Figure 9**, the selected portion and corresponding tags **908** are shown to be
15 inserted between the **<BODY>** and **</BODY>** tags. The document, once created is then presented to the user. In a preferred embodiment, the document is presented by display, as shown in **Figure 10**. In an alternate embodiment, the newly created document is sent directly
20 to the printer. Other forms of presentation will be readily apparent to one of ordinary skill in the art.

With reference now to **Figure 11A**, a flowchart of the general operation of a browser program is illustrated according to the first aspect of the present invention.
25 The execution of the instruction to present the selected portion of the document begins (step **1100**) and a new document is created (step **1102**). The program copies the header, **<BODY>** and **</BODY>** tags, and trailer information into the new document (step **1104**). The beginning and end
30 of the selected portion are marked in the current document (step **1106**). Next, the selected portion and any

Docket No. AUS000195US1

corresponding tags are copied into the body of the newly created document (step **1108**). Then, the newly created document is presented to the user (step **1110**) and the execution of the instruction to present the selected
 5 portion ends (step **1112**).

A preferred method of copying the selected portion and corresponding tags into the body of the newly created document, shown as step **1108** in **Figure 11A**, is illustrated in **Figure 11B**. The process begins at step
 10 **1120** after the **<BODY>** tag in the original document and proceeds to the next element of the document (step **1122**).

An element may be a single character or may be a recognized tag or string of text. For example, in the example document in **Figure 6**, the **<BODY>** tag appears as
 15 follows:

<BODY TEXT="#000000" LINK="#0000ff" VLINK="#800080">

and the next element is a comment tag **<!--Begin Ads-->**. It will be understood that comment tags may either be automatically copied to the new document or automatically
 20 skipped, because they do not affect the appearance of the web page. Alternatively, a test may be performed to determine whether the tag lies within the selected portion of the document. Although not shown in **Figure 10B**, the comment tag is skipped and the next element is
 25 the **<CENTER>** tag.

A determination is made whether the element is a tag (step **1124**). If the element is a tag, a determination is made whether the tag is an image tag (step **1126**). If the tag is not an image tag in step **1126**, a determination is
 30 made whether the tag is a beginning tag or an ending tag (step **1127**). Ending tags will begin with "</"

Docket No. AUS000195US1

characters. In a preferred embodiment, any tag that is not an image tag and does not begin with "</" characters will be considered a beginning tag; however, other methods of determining tags may be employed, such as

5 look-up tables of known tags. If the tag is a beginning tag in step **1127**, the process searches for a corresponding end tag in the remainder of the document (step **1128**) and a determination is made as to whether an end tag is found (step **1130**).

10 If an end tag is not found, the tag is copied to the new document (step **1132**). For simplicity, the current example shows that the tag is copied whether it is followed by selected text or images or not. Alternatively, a determination may be made whether the

15 tag is followed by selected text or images, as will be understood by one of ordinary skill in the art. If a beginning tag does not have a corresponding ending tag and is not followed by selected text or images, it may be skipped to avoid extraneous tags that have no effect on

20 the newly created document.

Referring again to step **1130**, if an end tag is found, a determination is made whether selected text or images lie between the begin tag and the end tag (step **1134**). If selected text or images do lie between the

25 begin tag and the end tag, the process proceeds to step **1132** and the tag is copied to the new document. If selected text or images do not lie between the begin tag and the end tag in step **1134**, the begin tag is skipped and the process returns to step **1122** to process the next

30 element.

Referring again to step **1124**, if the element is not a tag, the element is assumed to be text as it will

Docket No. AUS000195US1

appear in the web page. A determination is made whether the element is selected text (step **1136**). If it is not selected text, the element is skipped and the process returns to step **1122** to process the next element. The
5 element may be a single character, an entire string of unselected text not including tags, an entire string of selected text not including tags, etc. If the element is selected text in step **1136**, the text is copied to the new document (step **1138**).

10 Referring again to step **1126**, if the tag is an image, a determination is made whether it is a selected image (step **1140**). If it is not a selected image, the element is skipped and the process returns to step **1122** to process the next element of the original document. If
15 the element is a selected image in step **1140**, the image tag is copied to the new document (step **1142**).

Referring again to step **1127**, if the tag is an end tag, a determination is made whether the tag is the **</BODY>** tag (step **1144**). If the tag is the **</BODY>** tag,
20 then the process has reached the end of the body of the original document and ends (step **1146**). If the tag is not the **</BODY>** tag in step **1144**, a determination is made whether the tag has a corresponding begin tag that has been copied to the new document (step **1148**). If the end
25 tag does not have a corresponding begin tag that has been copied to the new document, the end tag is skipped and the process returns to step **1122** to process the next element. If it is determined in step **1148** that the end tag does have a corresponding begin tag that has been
30 previously copied to the new document, then the end tag is copied to the new document (step **1132**).

Docket No. AUS000195US1

In accordance with a second aspect of the invention, the user may determine a text portion of a document, the font size of which is too large or too small to be printed practically or legibly. However, conventional
5 web browsers do not allow a user to modify the font size of only a portion of a document for display and subsequent printing. The present invention solves this problem by allowing the user to instruct the web browser to create a copy of a document, insert font tags to
10 modify the size of only the selected portion, and display the newly created document for subsequent printing.

Turning now to **Figure 12**, a screen of display is shown in which a portion of the document has been selected, as depicted by highlighted portion **1202**. As
15 shown in **Figure 13**, a copy of the current document becomes the current document **1304** in document history. The font size of the selected portion is adjusted in document **1304** as instructed by the user. As seen in **Figure 12**, the selected portion includes the highlighted
20 text "Sample Web Document" **1202**. In the HTML document, the highlighted text is surrounded by the font tags **** and ****, as seen in **Figure 13**. In this case, since the highlighted text is the only text within the **** and **** tags, the font size is
25 adjusted by changing the **SIZE** attribute in the tag **1206**. If only a portion of the text within the **** and **** tags is selected, the size of the selected text would be adjusted by adding **** and **** tags before and after the selected text, respectively,
30 where "**X**" is the adjusted size. If the **** tag does not have a **SIZE** attribute or if a portion of the selected

Docket No. AUS000195US1

text is not nested within **** and **** tags, **** and **** tags are added for an increase in font size and **** and **** tags are added for a decrease in font size. If the selected text is
5 broken up by a plurality of font tags, then each substring within the selected portion will be adjusted independently based on its respective font tag. **Figure 14** shows a screen of display in which a representative document generated by the second aspect of the invention
10 is presented.

With reference now to **Figure 15A**, a flowchart of the general operation of a browser program is depicted according to the second aspect of the present invention. The execution of the instruction to change font size for
15 selected portion of the document begins (step **1500**) and a new document is created (step **1502**). The program copies the current document to the newly created document (step **1504**). The beginning and end of the selected portion are marked in the newly created document (step **1506**) and the
20 selected portion is divided into one or more subportions based on different uses of font tags within the selected portion (step **1508**). The program adjusts the size of each subportion (step **1510**). Then, the new document is displayed to the user (step **1512**) and instruction to
25 change font size for the selected portion ends (step **1514**).

With respect to **Figure 15B**, a flowchart shows general operation of adjusting the font size for each subportion, shown as step **1510** in **Figure 15A** is
30 illustrated in accordance with a preferred embodiment of the present invention. Execution begins (step **1520**) and

Docket No. AUS000195US1

a determination is made whether the subportion is surrounded by font tags (step **1522**). If the subportion is not surrounded by font tags, then **** and **** tags or **** and **** tags are added before and after the subportion of text, depending on the instruction from the user and execution ends (step **1534**). If the subportion is surrounded by font tags in step **1522**, a determination is made whether the font tag includes a size attribute (step **1526**). If the font tag does not include a size attribute, then **** and **** tags or **** and **** tags are added before and after the subportion of text, depending on the instruction from the user, and execution ends (step **1534**).

15 If the font tag does include a size attribute in step **1526**, a determination is made whether the selected text is the only text between the font tags (step **1528**). If the selected text is the only text between the font tags, then the size attribute in the font tag is

20 increased or decreased by one depending on the instruction from the user (step **1530**), and execution ends (step **1534**).

If the selected text is not the only text between the font tags in step **1528**, then **** and **** tags are added before and after the selected text, where **X** is the adjusted size, and execution ends (step **1534**).

As will be understood, the present invention is not limited to changing the font size, as described above.

30 The present invention may be used to change any attribute associated with the font of the selected portion. For

Docket No. AUS000195US1

example, the web browser may be configured to allow the user to select a portion of a document and issue an instruction to change the font face, color, or other attribute.

5 In accordance with a third aspect of the invention, the user may wish to view the web document as it will appear in printed form. However, conventional web browsers only allow a user to preview a document for subsequent printing. This feature is called a "Print
10 Preview" function. However, the "Print Preview" display is often difficult to read and does not act as a web page. Therefore, the present invention solves this problem by allowing the user to instruct the web browser to create a copy of a document, insert page break
15 indicator tags to indicate the locations of page breaks, and display the newly created document for subsequent printing.

 An example document created by the invention is shown in **Figure 16**. In response to instruction from the
20 user, document **1604** is created with page break indicator tags **1606** inserted at the appropriate location. The page break indicator is inserted as plain, preformatted text to be displayed in the web page. The text is surrounded by **<CENTER>** and **</CENTER>** tags and comment tags, such as
25 tags **<!--Begin Page Break-->** and **<!--End Page Break-->**. The comment tags are used to mark the page breaks for deletion before printing.

 Referring again to **Figure 3**, web browser **308** sends the original web document, along with the appropriate
30 instructions, to the printer device driver **314** or other device driver **312** through operating system **302** and I/O manager **310**. The instructions may take the form of an

005530 333250

Docket No. AUS000195US1

API call. An example call may be as follows:

req_page_break_info(document, count, page_info), where
"document" is the web document itself; "count" is the
number of pages in the web document to be supplied by the
5 printer device driver; and, "page_info" is an input and
output parameter, the input parameter being the "page
setup" information and the output from the printer driver
is the locations where page breaks should lie. The "page
setup" information includes settings within the
10 application, such as margins, paper size, and paper
orientation.

According to an alternate embodiment of the present
invention, the web browser application can estimate the
locations of page breaks using the "page setup"
15 information, sizes of fonts, sizes of images, etc.
However, characteristics of printers vary and the printed
pages will not always appear as estimated. For example,
due to differences in printer characteristics (e.g.,
resolution), a page printed on a dot matrix printer will
20 appear different from a page printed on a laser printer,
particularly where line breaks and page breaks lie.
Therefore, receiving the page break information from the
printer driver is more reliable. **Figure 17** illustrates
an example screen of display according to a preferred
25 embodiment of the present invention.

Turning now to **Figure 18A**, a flowchart of the
general operation of the page break display feature is
depicted in accordance with a preferred embodiment of the
present invention. The process begins (step **1800**) and
30 the current document is sent to the printer device driver
(step **1802**). Page break and page count information is
received from the printer device driver (step **1804**).

Docket No. AUS000195US1

Then, a new document is created (step **1806**) and the current document is copied to the new document (step **1808**). Page break indicators are inserted into the newly created document (step **1810**). Next, the new document is presented to the user (step **1812**) and the process ends (step **1814**).

With respect to **Figure 18B**, a flowchart shows the general operation of the deletion of page break indicators when printing a document. The process begins at step **1820**, and a print request is received (step **1822**). The process searches for page break comment tags (step **1824**) and removes page break indicators from the document when they are found (step **1826**). The document is then sent to the printer (step **1828**) and the process ends (step **1830**).

According to an alternate embodiment of the present invention, the step of removing page break indicators from the document (step **1826**) may include the insertion of forced page breaks in the place of the page break indicators. By forcing page breaks at the time of printing, the present invention prevents partial printing of lines of text or images at bottoms of printed pages.

The present invention allows a user to display and print a selected portion of a web page, to change font attributes of a selected portion of a web page, and to display a web page with an indication of where the page breaks will occur and how many pages there are in the document in a web browser without employing a word processor or web page editor application. Switching between a web browser and a word processor is cumbersome and time consuming. Word processors consume memory with complex software, which is unnecessary for the simple

Docket No. AUS000195US1

tasks of printing and changing the font properties of a
portion of a web document. Furthermore, word processors
do not include many of the features for which web
browsers were designed, such as seamless navigation
5 between pages, executing Java applets, managing and
executing plug-in applications, executing CGI scripts,
etc. The present invention provides added printing
functionality without requiring explicit, burdensome
steps to be performed by the user and without loss of web
10 browser functionality.

It will be recognized that the aspects of the
present invention may be used in conjunction with one
another to provide more control over the presentation of
a web page. For example, a user may select a portion of
15 a web page to eliminate the presentation of banner
advertisements. Then, the user may select a portion of
the resulting display and instruct the program to change
the size of the font of the selected text. The user may
then instruct the program to display page breaks within
20 the resulting page. Each time the user issues an
instruction, a new page is created and the previous page
remains on the web server, is discarded, or becomes part
of the document history.

It is important to note that while the present
25 invention has been described in the context of a fully
functioning data processing system, those of ordinary
skill in the art will appreciate that the processes of
the present invention are capable of being distributed in
the form of a computer readable medium of instructions
30 for execution by a data processing system and a variety
of forms and that the present invention applies equally
regardless of the particular type of signal bearing media

Docket No. AUS000195US1

actually used to carry out the distribution. Examples of computer readable media include recordable-type media such a floppy disc, a hard disk drive, a RAM, and CD-ROMs and transmission-type media such as digital and analog
5 communications links.

The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and
10 variations will be apparent to those of ordinary skill in the art. The embodiment was chosen and described in order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for
15 various embodiments with various modifications as are suited to the particular use contemplated.

Docket No. AUS000195US1

CLAIMS:

What is claimed is:

1. A method in a web browser on a data processing system
5 for processing a document, the method comprising:
 receiving a first web document including formatting
 information used to display the first web document;
 receiving a request to present a selected portion of
the first web document;
10 identifying formatting information associated with
the selected portion of the first web document; and
 creating in the web browser a second web document
including the selected portion and the formatting
information associated with the selected portion, in
15 response to receiving the request.
2. The method of claim 1, further comprising sending the
second web document to an output device.
- 20 3. The method of claim 2, wherein the output device is a
printer.
4. The method of claim 2, wherein the output device is a
display device.
- 25 5. The method of claim 1, further comprising:
 receiving a request to change a font attribute of a
selected portion of the second web document; and
 creating in the web browser a third web document
30 from the second web document, wherein the font attribute,
within the third web document, of the selected portion is
changed in response to receiving the request to change

[illegible][illegible]

- [illegible]

Docket No. AUS000195US1

is hypertext markup language.

11. The method of claim 10, wherein the formatting information includes hypertext markup language tags.

5

12. The method of claim 10, wherein the formatting information includes a header.

13. A method in a web browser on a data processing system
10 for processing a document, said method comprising:

receiving a first web document;

receiving a request to change a font attribute of a selected portion of the first web document; and

15 creating in the web browser a second web document from the first web document, wherein the font attribute, within the second web document, of the selected portion is changed in response to receiving the request to change the font attribute of the selected portion.

20 14. The method of claim 13, wherein the step of creating the second web document includes inserting virtual font indicators before and after text within the selected portion.

25 15. The method of claim 14, further comprising sending the second web document to an output device.

16. The method of claim 15, wherein the output device is a display device, the selected portion being displayed
30 according to the virtual font indicators.

17. The method of claim 15, wherein the output device is

Docket No. AUS000195US1

a printer, the selected portion being printed according to the virtual font indicators.

18. The method of claim 14, wherein the first web
5 document and the second web document are markup language documents.

19. The method of claim 18, wherein the virtual font
10 indicators include tags.

20. The method of claim 18, wherein the markup language
is hypertext markup language.

21. The method of claim 20, wherein the virtual font
15 indicators include hypertext markup language tags.

22. The method of claim 13, further comprising
identifying at least one font indicator associated with
text within the selected portion of the first web
20 document, wherein the step of creating the second web
document includes modifying the font attribute of the
associated at least one font indicator.

23. The method of claim 22, further comprising sending
25 the second web document to an output device.

24. The method of claim 23, wherein the output device is
a display device, the selected portion being displayed
according to the modified at least one font indicator.

30 25. The method of claim 23, wherein the output device is
a printer, the selected portion being printed according

Docket No. AUS000195US1

to the modified at least one font indicator.

26. The method of claim 22, wherein the first web
document and the second web document are markup language
5 documents.

27. The method of claim 26, wherein the at least one
font indicator includes a tag.

10 28. The method of claim 26, wherein the markup language
is hypertext markup language.

29. The method of claim 28, wherein the at least one
font indicator includes a hypertext markup language tag.
15

30. The method of claim 13, wherein the step of creating
the second web document comprises creating a copy of the
first web document and changing the font attribute of the
selected portion within the copy of the first web
20 document.

31. The method of claim 13, wherein the step of creating
the second web document comprises changing the font
attribute of the selected portion within the first web
25 document to create the second web document.

32. A method in a web browser on a data processing system
for processing a document, the method comprising:
receiving a first web document;
30 receiving a request to display page break indicators
within the first web document;
identifying page break information for the first web

Docket No. AUS000195US1

document for an output device; and

creating in the web browser a second web document
from the first web document, wherein at least one virtual
page break indicator is inserted into the second web
5 document, in response to the page break information, to
indicate the location of page breaks.

33. The method of claim 32, further comprising:

removing the at least one virtual page break
10 indicator; and
printing the second web document.

34. The method of claim 32, further comprising:

replacing the at least one virtual page break
15 indicator with at least one forced page break; and
printing the second web document.

35. The method of claim 32, further comprising sending
the second web document to the output device.

20

36. The method of claim 35, wherein the output device is
a printer.

37. The method of claim 35, wherein the output device is
25 a display device.

38. The method of claim 32, wherein the first web
document and the second web document are markup language
documents.

30

39. The method of claim 38, wherein the at least one
virtual page break indicator includes a tag.

Docket No. AUS000195US1

40. The method of claim 38, wherein the markup language is hypertext markup language.

5 41. The method of claim 40, wherein the at least one virtual page break indicator includes a hypertext markup language tag.

10 42. The method of claim 32, wherein the step of creating the second web document comprises creating a copy of the first web document and inserting at least one virtual page break indicator into the copy of the first web document.

15 43. The method of claim 32, wherein the step of creating the second web document comprises inserting the at least one virtual page break indicator into the first web document to create the second web document.

20 44. The method of claim 32, wherein the step of identifying page break information comprises sending the first web document to a device driver and receiving page break information corresponding to the first web document from the device driver.

25 45. The method of claim 32, wherein the device driver is a printer driver.

30 46. The method of claim 32, wherein the step of identifying page break information comprises identifying the location of at least one page break based on page setup information, document formatting information, and

Docket No. AUS000195US1

document content.

47. A method in a web browser on a data processing system for processing a document, the method comprising:

- 5 receiving a first web document;
 receiving a request to perform an action, wherein
the request to perform an action comprises one of a
request to present a selected portion of the first web
document, a request to change a font attribute of a
10 selected portion of the first web document, and a request
to display page break indicators within the first web
document; and
 creating in the web browser a second web document
comprising at least a portion of the first web document
15 in response to receiving the request.

48. An apparatus for processing a document, comprising:

- receiving means for receiving a first web document
including formatting information used to display the
20 first web document;
 receiving means for receiving a request to present a
selected portion of the first web document;
 identifying means for identifying formatting
information associated with the selected portion of the
25 first web document; and
 creating means for creating in a web browser a
second web document consisting of the selected portion
and the formatting information associated with the
selected portion in response to receiving the request.

30

49. The apparatus of claim 48, further comprising means
for displaying the second web document.

00529346-39262500

Docket No. AUS000195US1

50. The apparatus of claim 48, further comprising means for printing the second web document.

5 51. The apparatus of claim 48, further comprising:

means for receiving a request to change a font attribute of a selected portion of the second web document; and

10 means for creating a third web document from the second web document, wherein the font attribute of the selected portion within the third web document is changed in response to receiving the request to change the font attribute of the selected portion.

15 52. The apparatus of claim 48, further comprising:

means for receiving a request to display page break indicators within the second web document;

means for identifying page break information for the second web document for an output device; and

20 means for creating a third web document from the second web document, wherein at least one virtual page break indicator is inserted into the third web document, in response to the page break information, to indicate the location of page breaks.

25

53. An apparatus for processing a document, comprising:

receiving means for receiving a first web document;

receiving means for receiving a request to change a font attribute of a selected portion of the first web

30 document; and

creating means for creating in a web browser a second web document from the first web document, wherein

Docket No. AUS000195US1

the font attribute of the selected portion within the second web document is changed in response to receiving the request to change the font attribute of the selected portion.

5

54. The apparatus of claim 53, wherein the creating means comprises means for inserting virtual font indicators before and after text within the selected portion.

10

55. The apparatus of claim 54, further comprising means for displaying the second web document, the selected portion being displayed according to the virtual font indicators.

15

56. The apparatus of claim 54, further comprising means for printing the second web document, the selected portion being printed according to the virtual font indicators.

20

57. The apparatus of claim 53, further comprising means for identifying at least one font indicator associated with text within the selected portion of the first web document, wherein the creating means comprises means for modifying the font attribute of the associated at least one font indicator.

25

58. The apparatus of claim 57, further comprising means for displaying the second web document, the selected portion being displayed according to the at least one modified font indicator.

30

0057336-9302560

59. The apparatus of claim 57 further comprising means for printing the second web document, the selected portion being printed according to the at least one modified font indicator.

60. An apparatus for processing a document, comprising:
 receiving means for receiving a first web document;
 receiving means for receiving a request to display
 page break indicators within the first web document;
 identifying means for identifying page break
 information for the first web document for an output
 device; and

creating means for creating in a web browser a second web document from the first web document, wherein at least one virtual page break indicator is inserted into the second web document, in response to the page break information, to indicate the location of page breaks.

61. The apparatus of claim 60, further comprising:
removing means for removing the at least one virtual
page break indicator; and
printing means for printing the second web document.

62. The apparatus of claim 60, further comprising:
replacing means for replacing the at least one
virtual page break indicator with at least one forced
page break; and
printing means for printing the second web document.

63. The apparatus of claim 60, further comprising means for displaying the second web document.

Docket No. AUS000195US1

64. An apparatus for processing a document, comprising:
receiving means for receiving a first web document
including a header;

5 receiving means for receiving a request to perform
an action, wherein the request to perform an action
comprises one of a request to present a selected portion
of the first web document, a request to change a font
attribute of a selected portion of the first web
10 document, and a request to display page break indicators
within the first web document; and

creating means for creating in a web browser a
second web document comprising at least a portion of the
first web document in response to receiving the request.

15

65. A computer program product in a computer readable
medium for processing a document, the computer program
product comprising:

instruction means for receiving a first web document
20 including formatting information used to display the
first web document;

instruction means for receiving a request to present
a selected portion of the first web document;

instruction means for identifying formatting
25 information associated with the selected portion of the
first web document; and

instruction means for creating in a web browser a
second web document consisting of the selected portion
and the associated formatting information in response to
30 receiving the request.

66. A computer program product in a computer readable

2025 RELEASE UNDER E.O. 14176

Docket No. AUS000195US1

medium for processing a document, the computer program product comprising:

instruction means for receiving a first web document;

- 5 instruction means for receiving a request to change a font attribute of a selected portion of the first web document; and

instruction means for creating in a web browser a second web document from the first web document, wherein
10 the font attribute of the selected portion within the second web document is changed in response to receiving the request to change the font attribute of the selected portion.

- 15 67. A computer program product in a computer readable medium for processing a document, the computer program product comprising:

instruction means for receiving a first web document;

- 20 instruction means for receiving a request to display page break indicators within the first web document;

instruction means for identifying page break information corresponding to the first web document; and

- instruction means for creating in a web browser a
25 second web document from the first web document, wherein at least one virtual page break indicator is inserted into the second web document, in response to the page break information, to indicate the location of page breaks.

30

68. A computer program product in a computer readable medium for processing a document, the computer program

00550-996360

Docket No. AUS000195US1

product comprising:

instruction means for receiving a first web document;

instruction means for receiving a request to perform
5 an action, wherein the request to perform an action
comprises one of a request to present a selected portion
of the first web document, a request to change a font
attribute of a selected portion of the first web
document, and a request to display page break indicators
10 within the first web document; and

instruction means for creating in a web browser a
second web document comprising at least a portion of the
first web document in response to receiving the request.

15 69. An apparatus comprising:

a processor;

a memory electrically connected to said processor,
the memory having stored therein a program to be executed
on said processor for performing the following steps:

20 receiving a first web document including;

receiving a request to perform an action,
wherein the request to perform an action
comprises one of a request to present a
selected portion of the first web document, a
25 request to change a font attribute of a
selected portion of the first web document, and
a request to display page break indicators
within the first web document; and

creating in a web browser a second web
30 document comprising at least a portion of the
first web document in response to receiving the
request.

00579366-95062500

Docket No. AUS000195US1

70. A computer system having stored therein a web browser application, the system comprising:

5 interface means for allowing the user to interface with the web browser application;

communication means for receiving a first web document form a network;

10 creation and editing means for creating a second web document, wherein the creation and editing means has a plurality of modes of operation including:

15 a first mode of operation in which the creation and editing means receives a request from the interface means to present a selected portion of the first web document, identifies formatting information associated with the selected portion of the first web document, and creates in the web browser a second web document consisting of the selected portion and the associated formatting information in response to receiving the request;

20 a second mode of operation in which the creation and editing means receives a request from the interface means to change a font attribute of a selected portion of the first web document, and creates in the web browser a second web document from the first web document, wherein the font attribute of the selected portion within the second web document is changed in response to receiving the request to change the font attribute of the selected portion; and

30 a third mode of operation in which the

[illegible]

10

Docket No. AUS000195US1

ABSTRACT OF THE DISCLOSURE


METHOD AND SYSTEM FOR INCORPORATION OF GRAPHICAL PRINT TECHNIQUES IN A WEB BROWSER

5

A web browser application program provides graphical print techniques, which allow the user to control how a web page is presented. The data processing system, under instruction of a program, responds to an instruction by the user to present a selected portion of a first document by creating a new document from the first document including the header, trailer, and the selected portion. The data processing system responds to an instruction by the user to change the font size of a selected portion of the first document by creating a copy of the first document and modifying or inserting font tags within the copy of the document. The data processing system responds to an instruction by the user to present the first document with page break indicators by creating a copy of the first document and inserting page break indicators within the copy to be presented to the user. The graphical print techniques may also be used together.

Figure 1

AUS000195US1

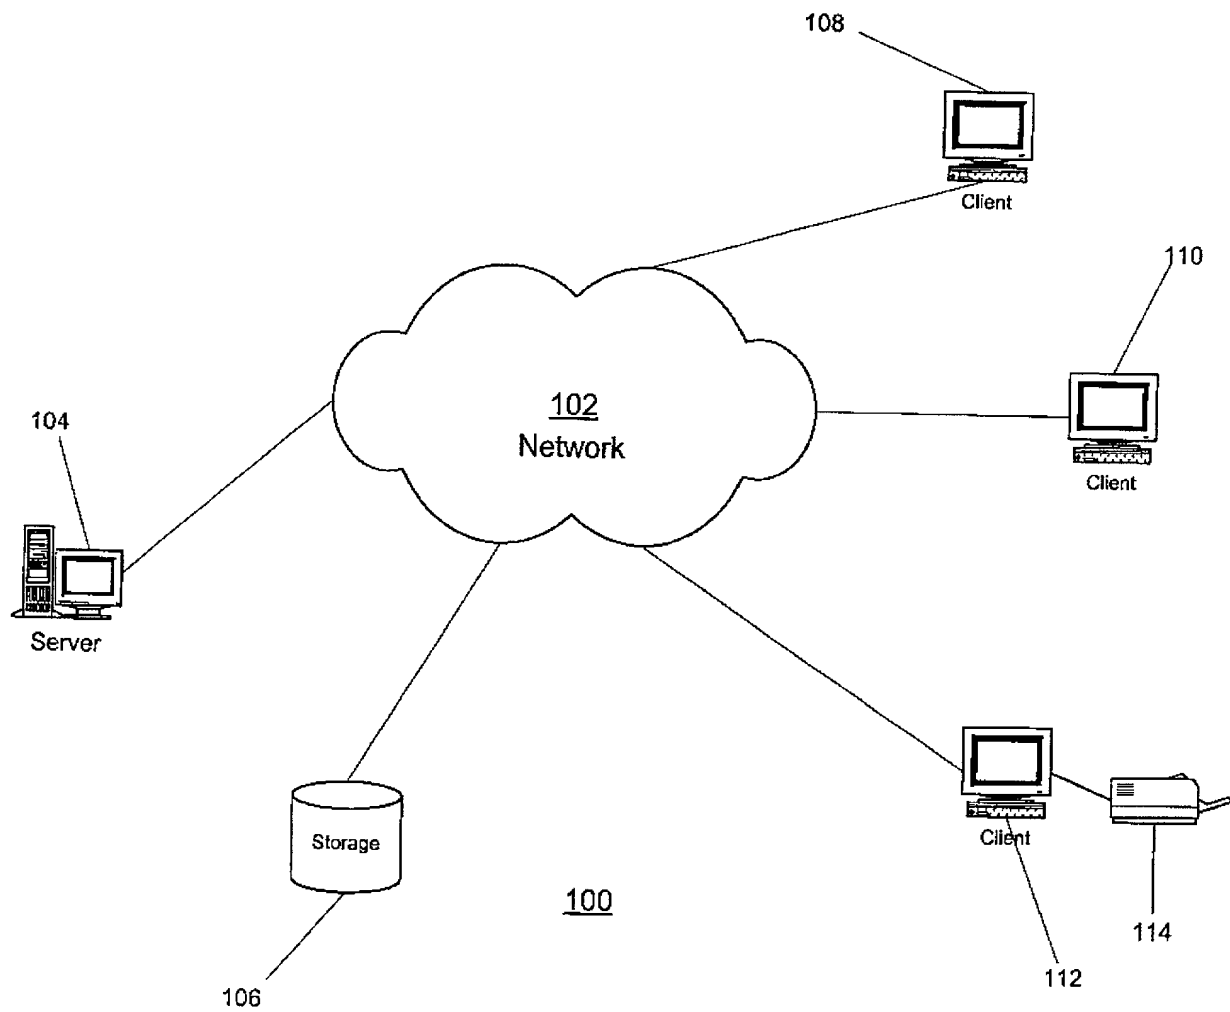

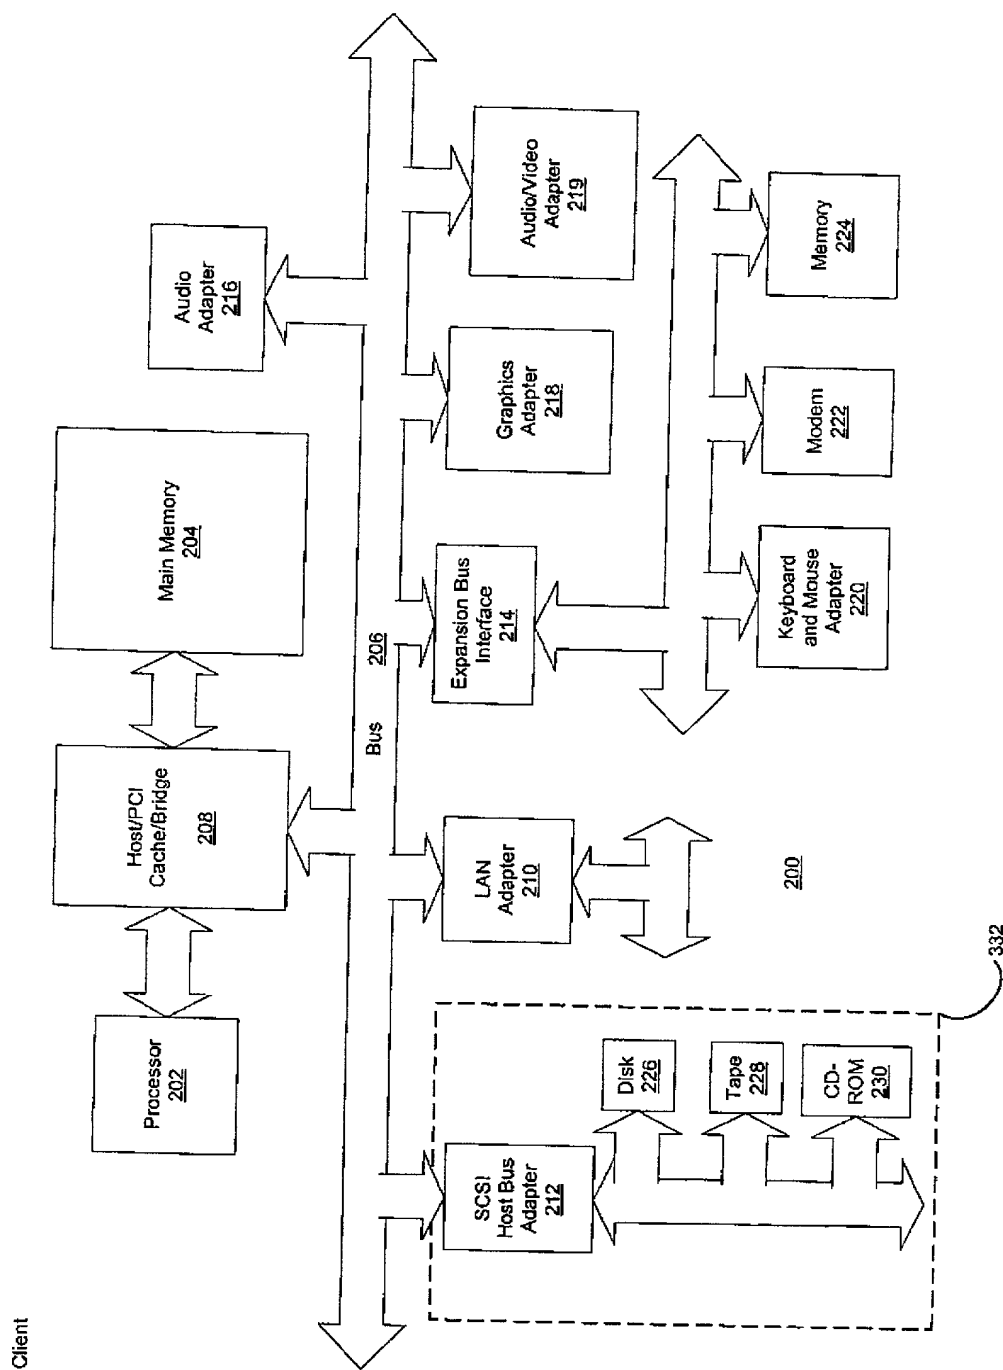
[illegible]

Figure 2
AUS000195US1

AUS000195US1

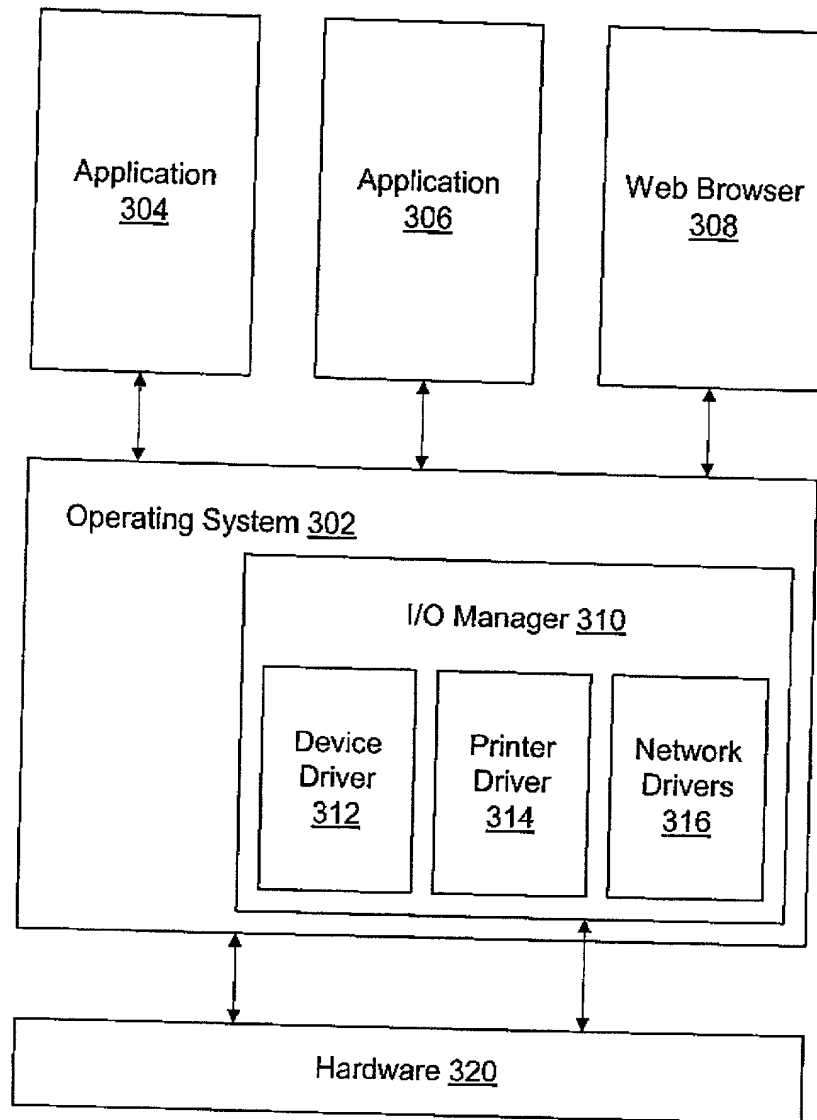
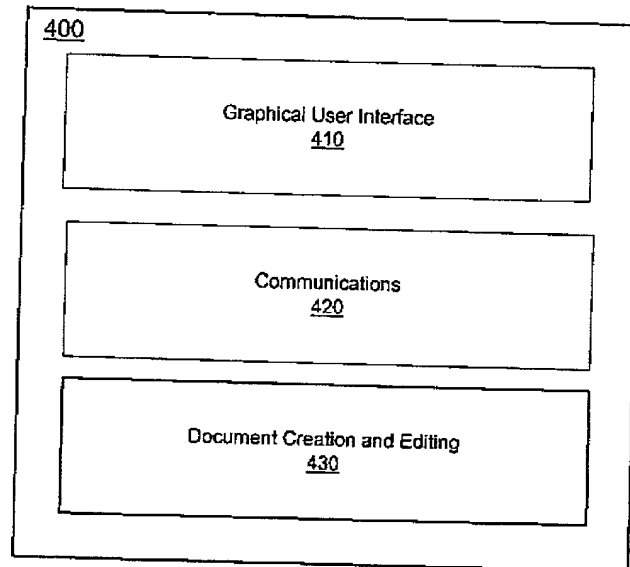


Figure 3

AUS000195US1

Figure 4

AUS000195US1




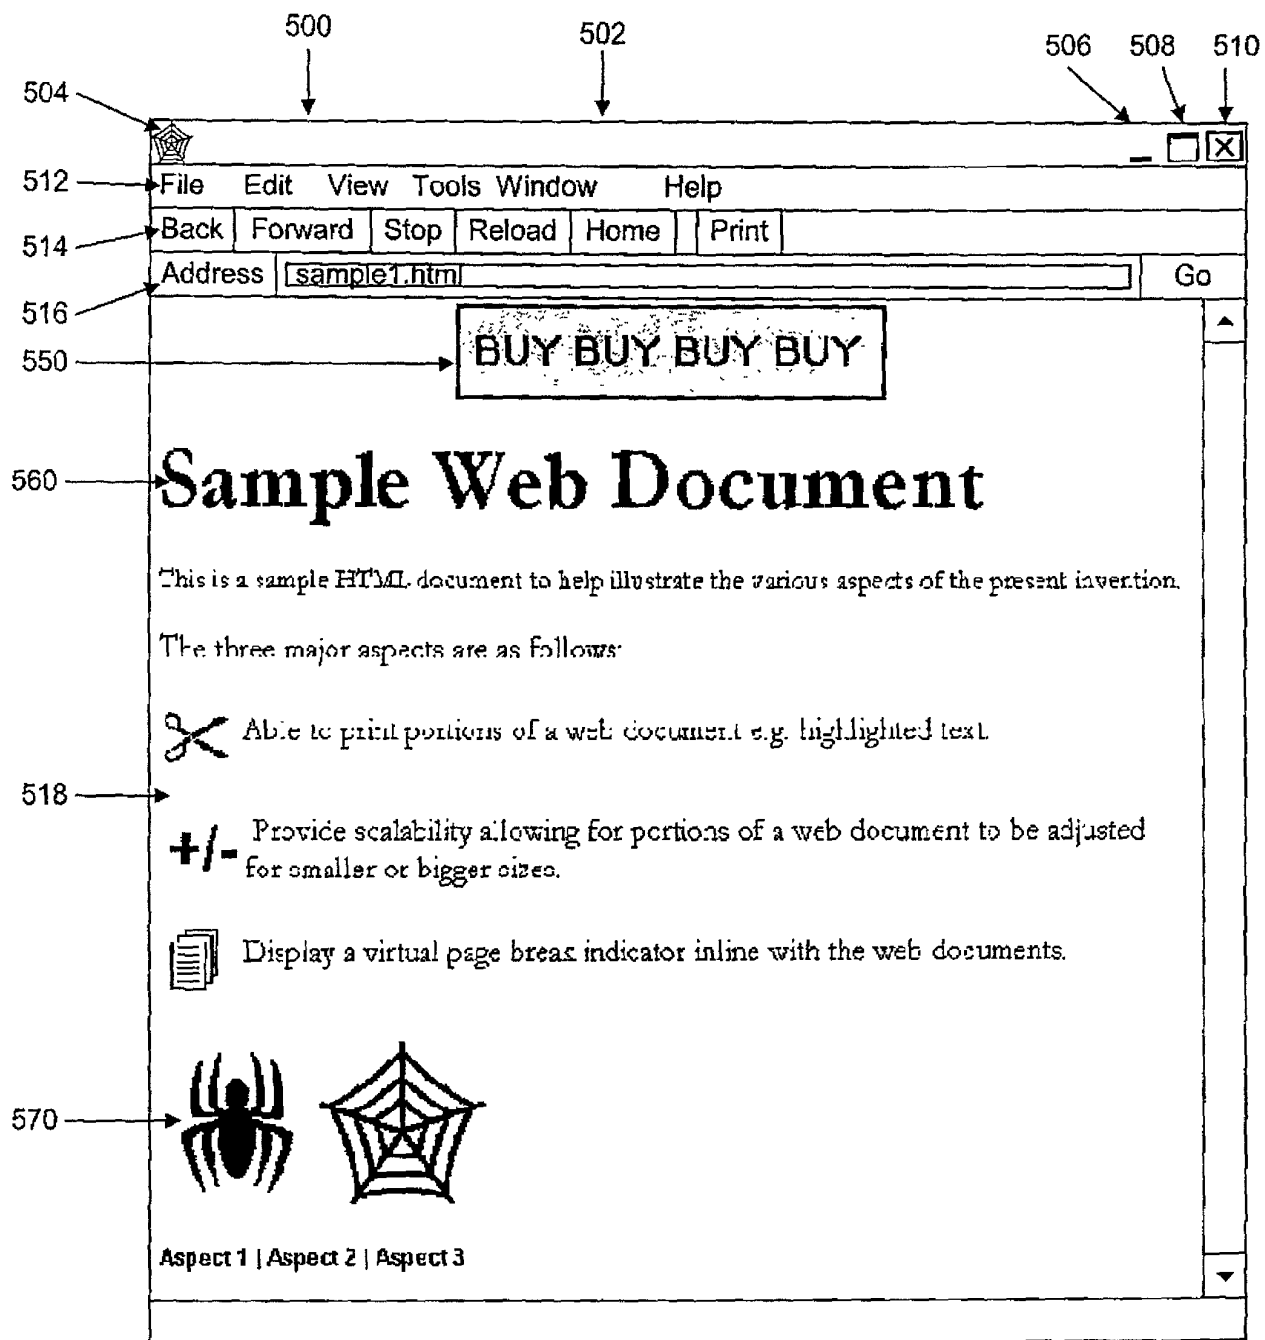


Figure 5

AUS000195US1

Figure 6

AUS000195US1

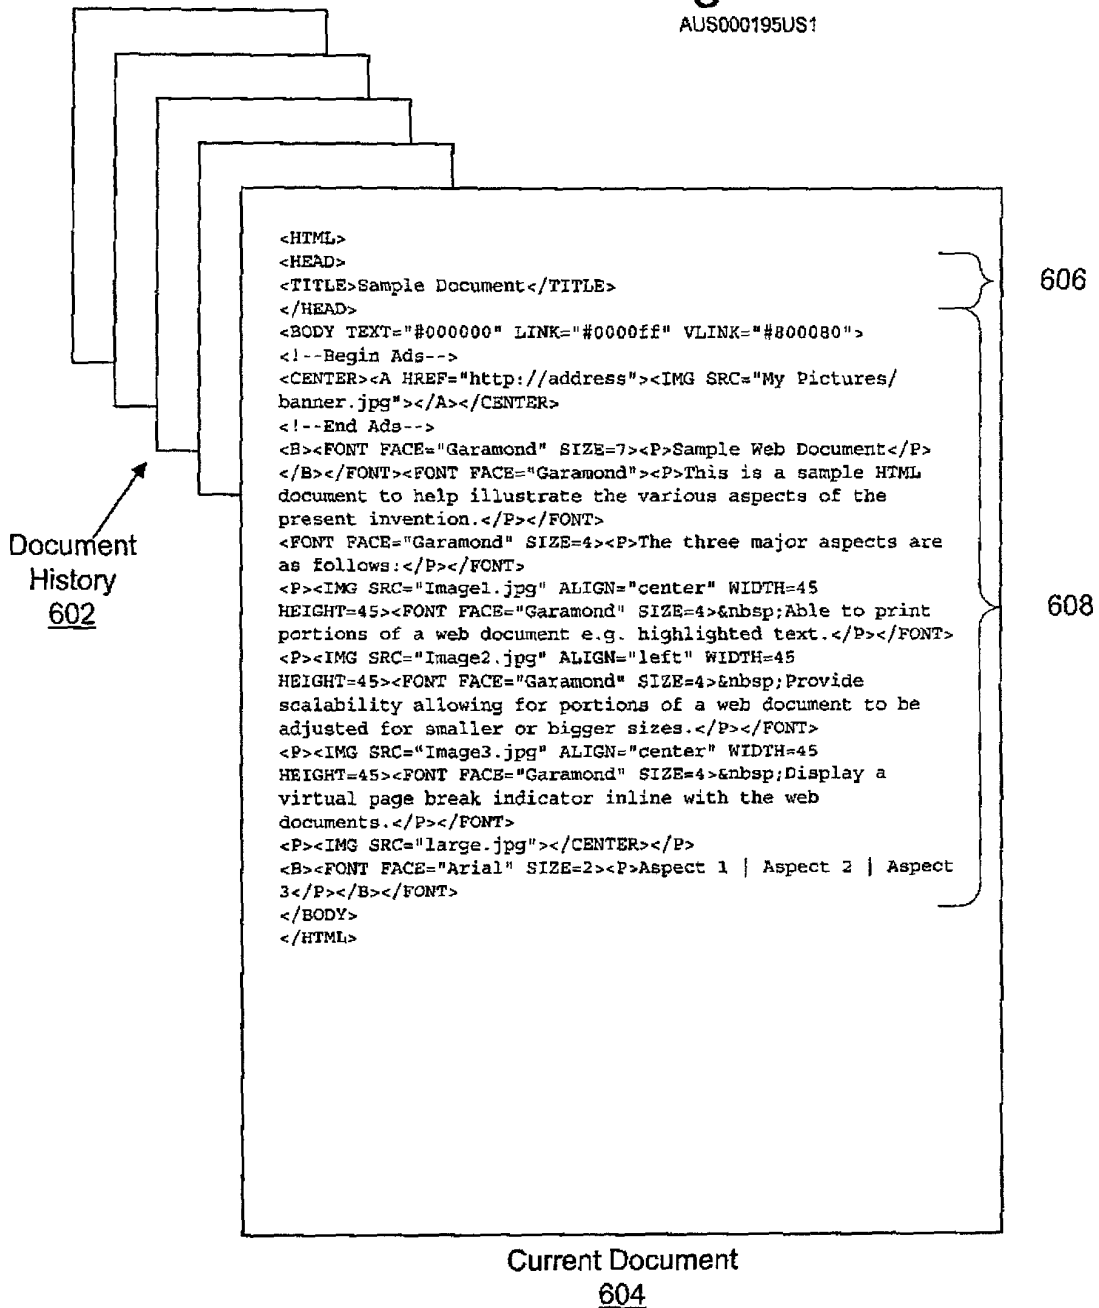

```
graph TD
    Start([Begin 700]) --> Receive[Receive URL 705]
    Receive --> Retrieve[Retrieve Document from Server 710]
    Retrieve --> Display[Display Document 715]
    Display --> Reload{Reload? 720}
    Reload -- Yes --> Retrieve
    Reload -- No --> NewURL{New URL? 725}
    NewURL -- Yes --> Receive
    NewURL -- No --> Action{Action Requested? 730}
    Action -- Yes --> EndA((A))
    Action -- No --> B((B))
    B --> Display
```

AUS000195US1

00579256-05500


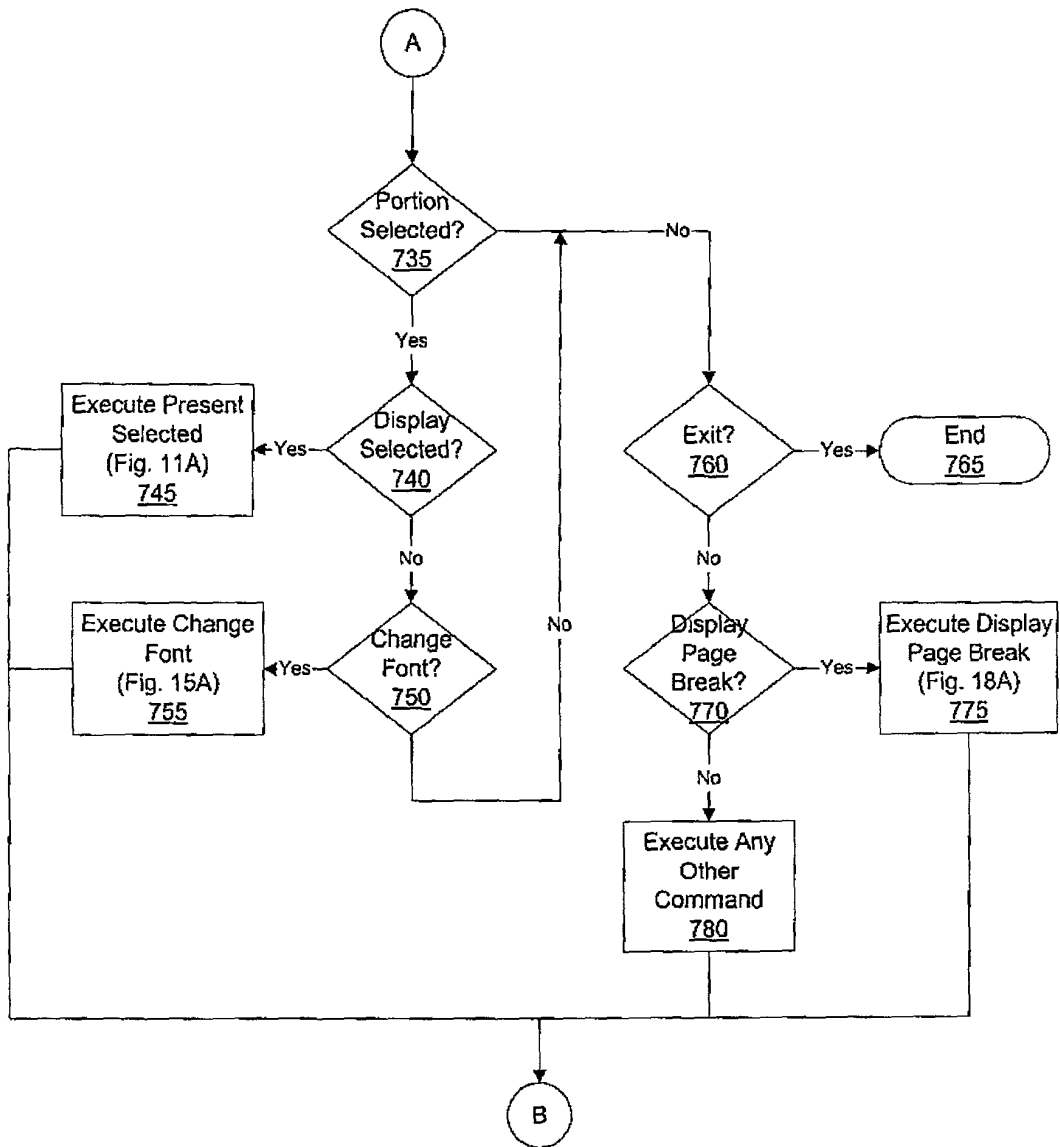


Figure 7B

AUS000195US1

Figure 8

AUS000195US1

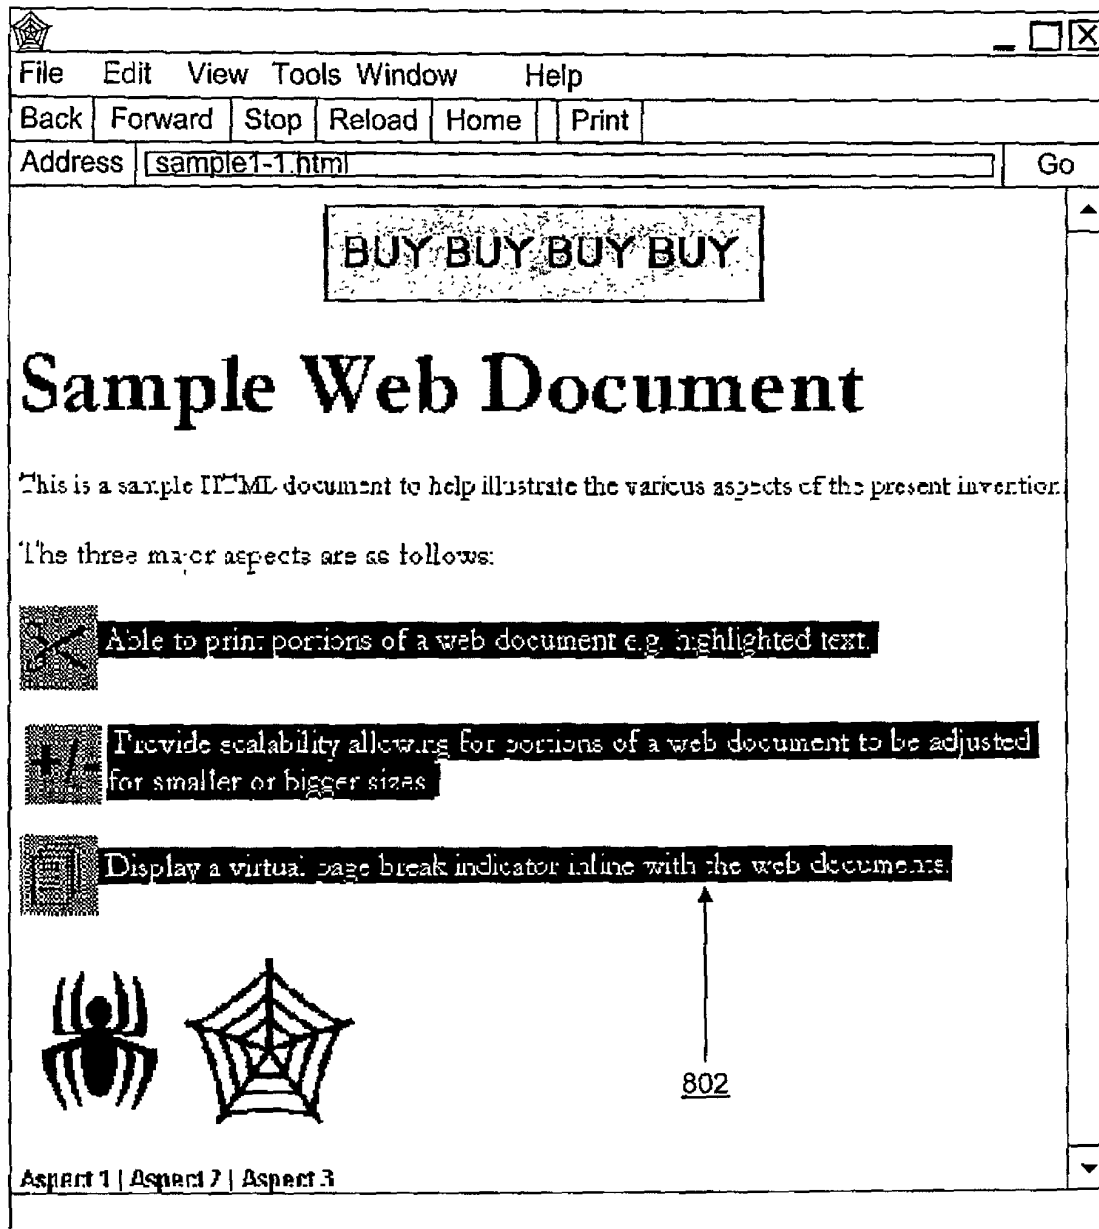

09579255-092500

Figure 9

AUS000195US1


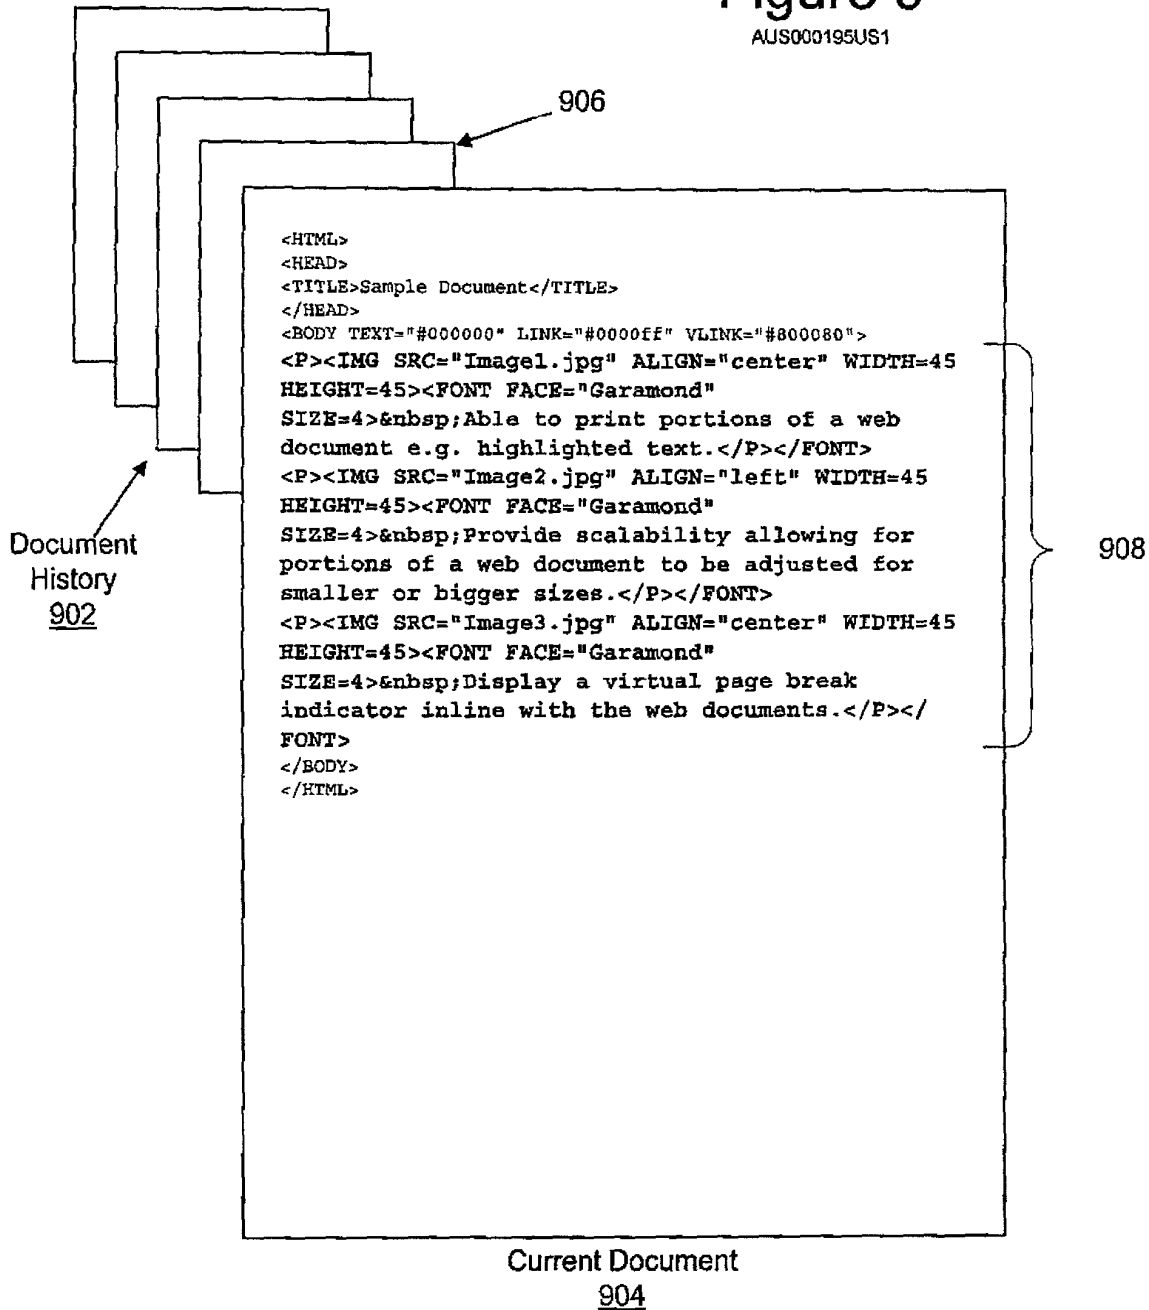


Figure 10

AUS000195US1

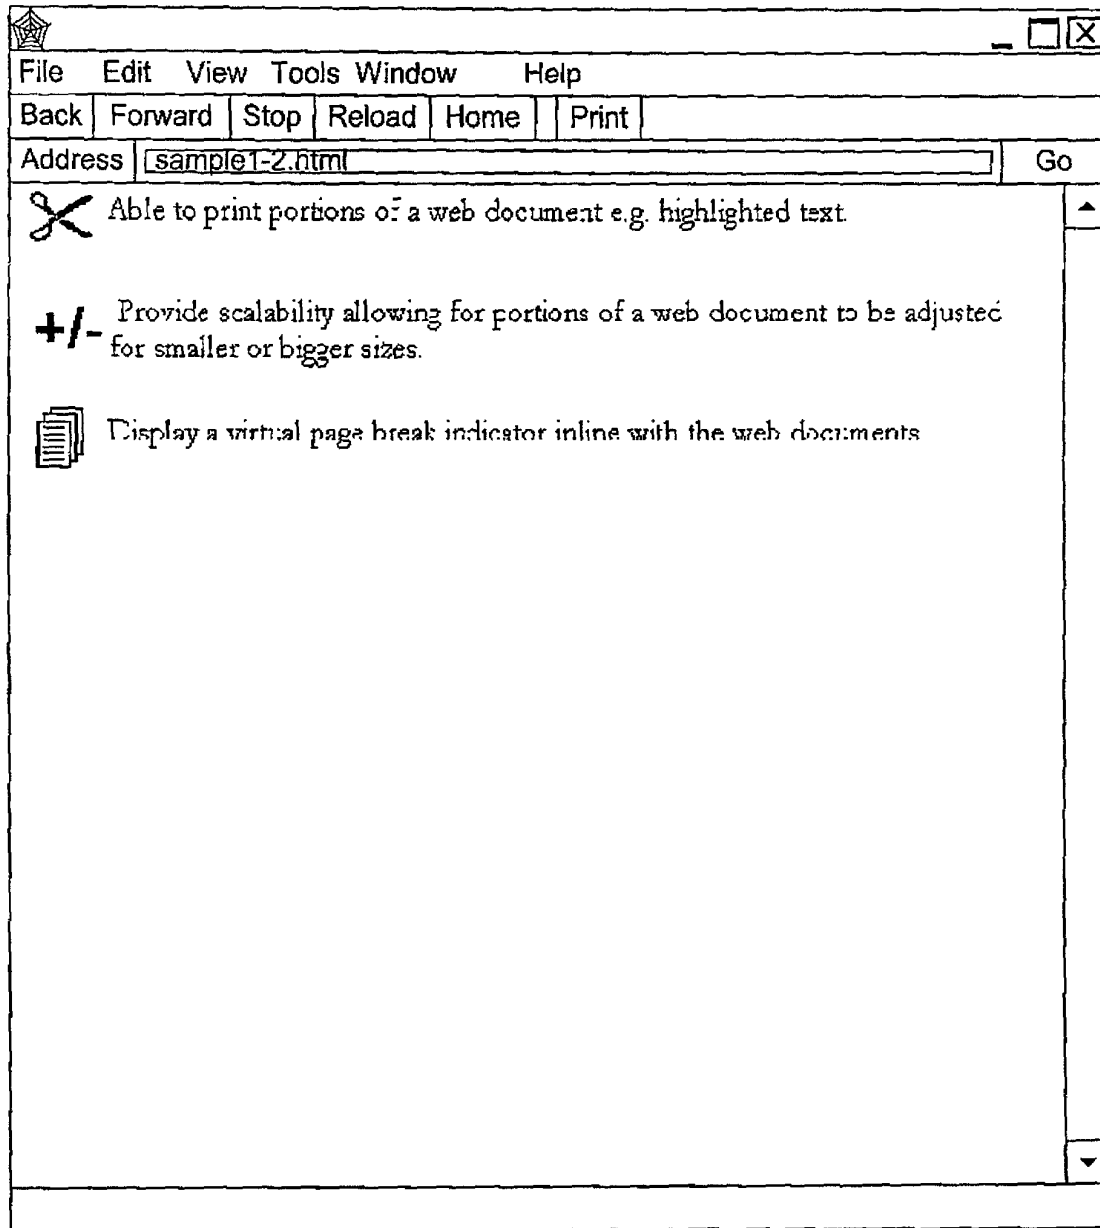

0055792556 03300
0055230 95264560

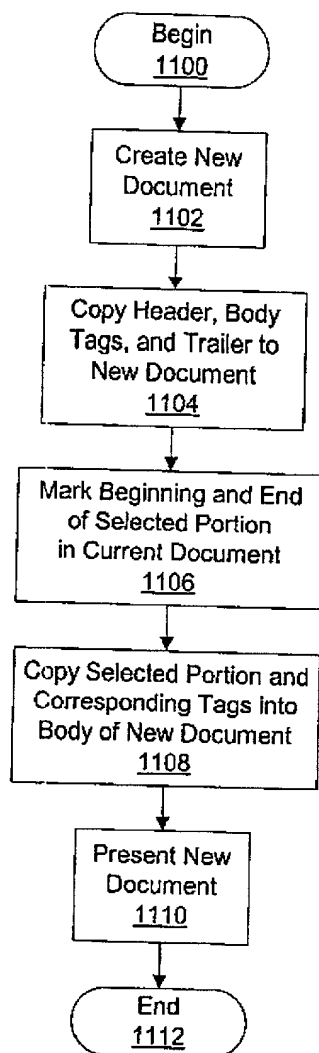


Figure 11A

AUS000195US1

Figure 11B

AUS000195US1


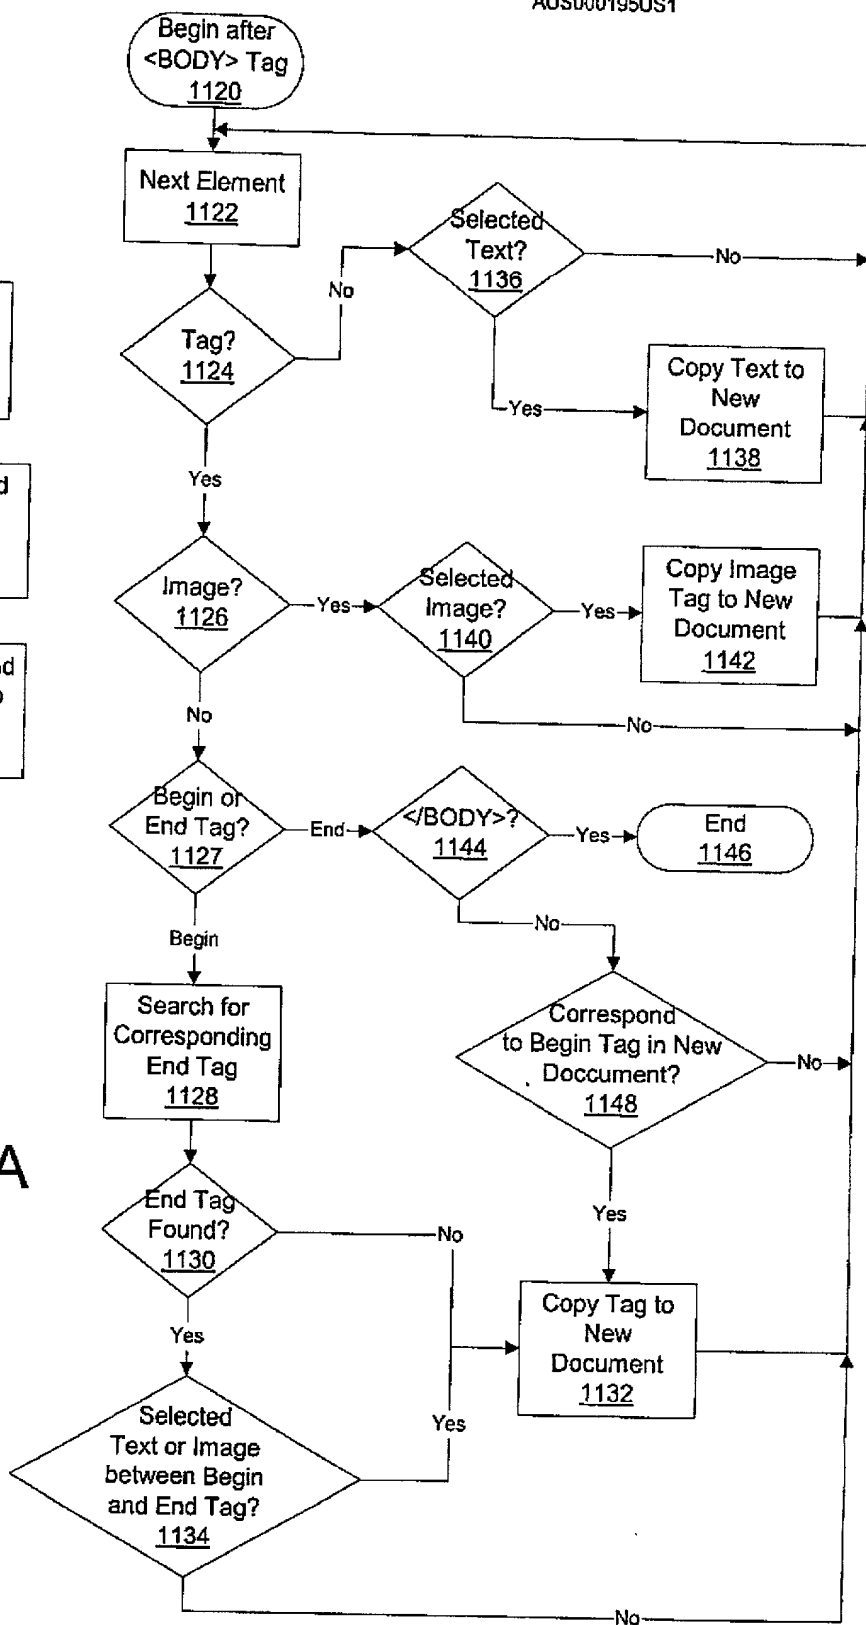


Figure 12


AUS000195US1

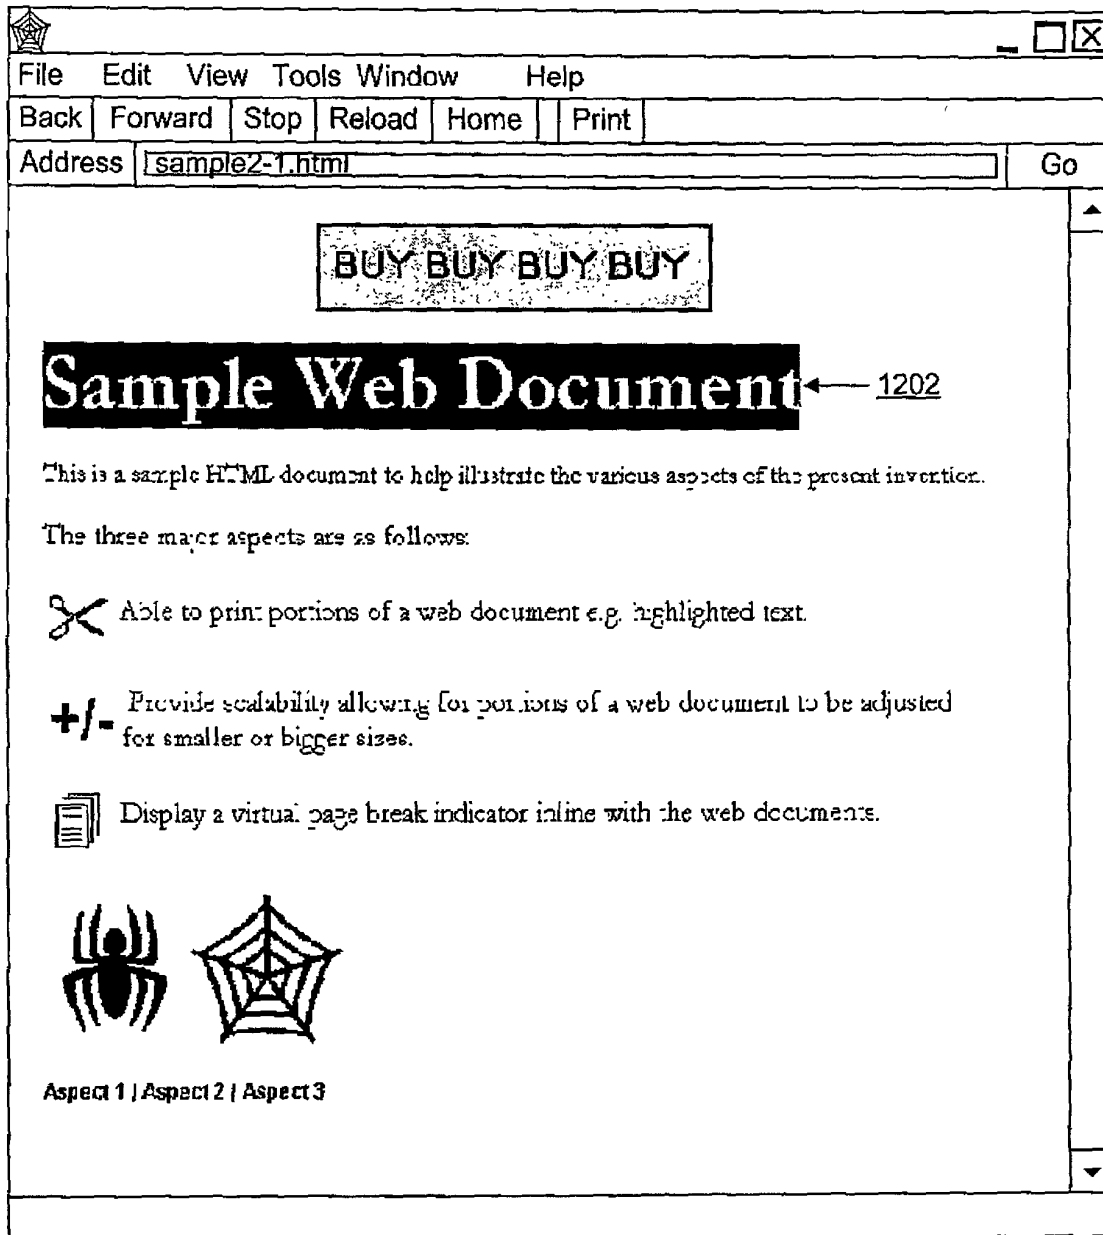

005792556-052500

Figure 13

AUS000195US1

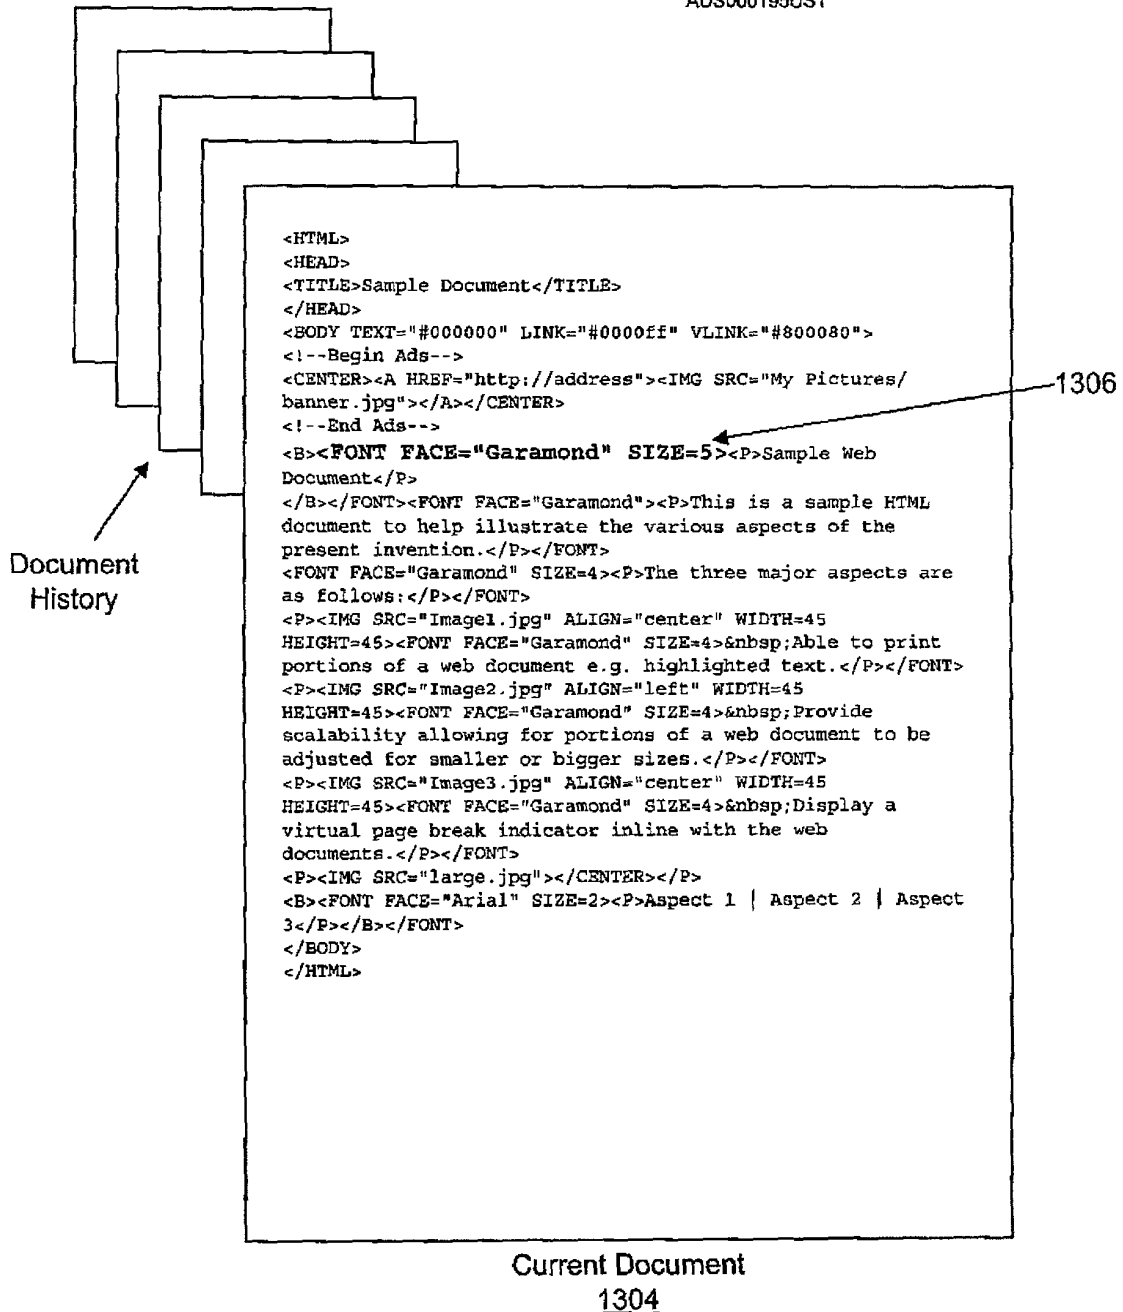

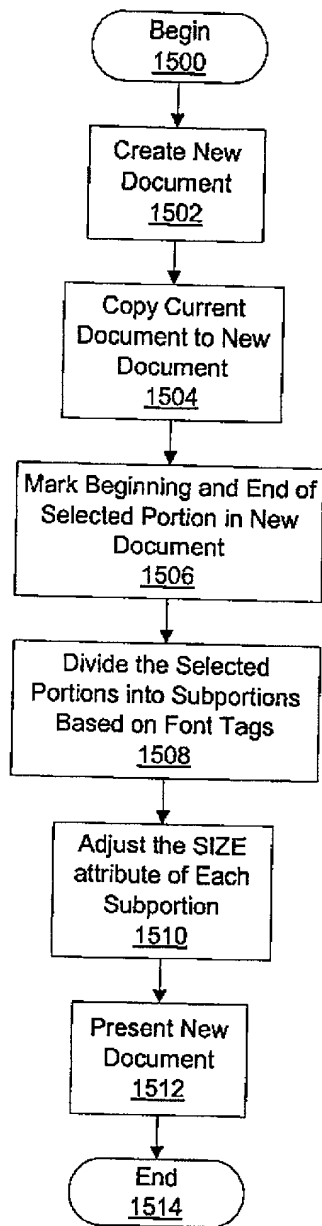


Figure 15A
AUS000195US1

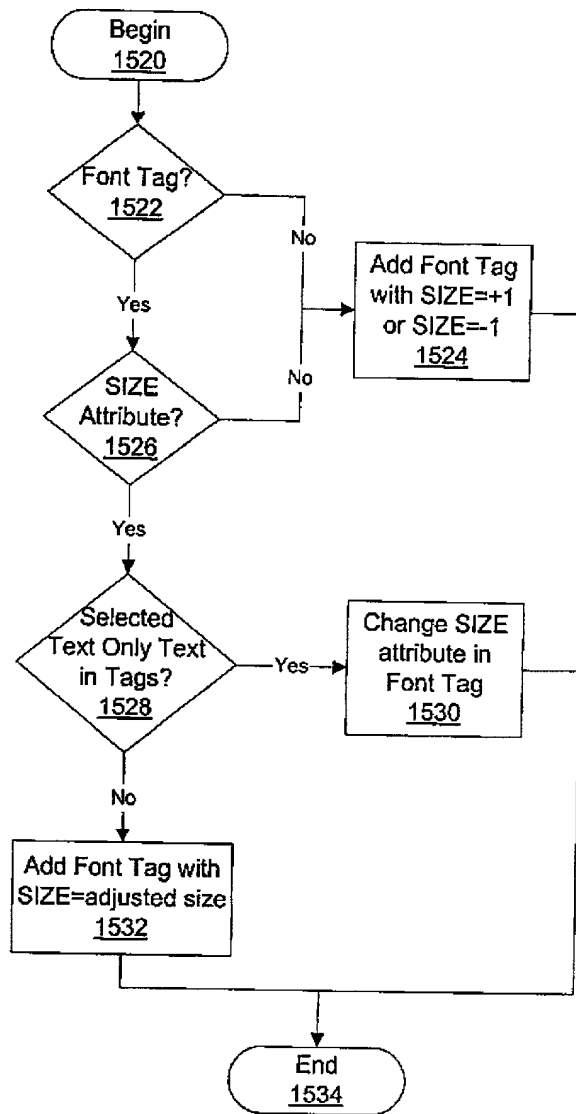


Figure 15B
AUS000195US1

Figure 16

AUS000195US1

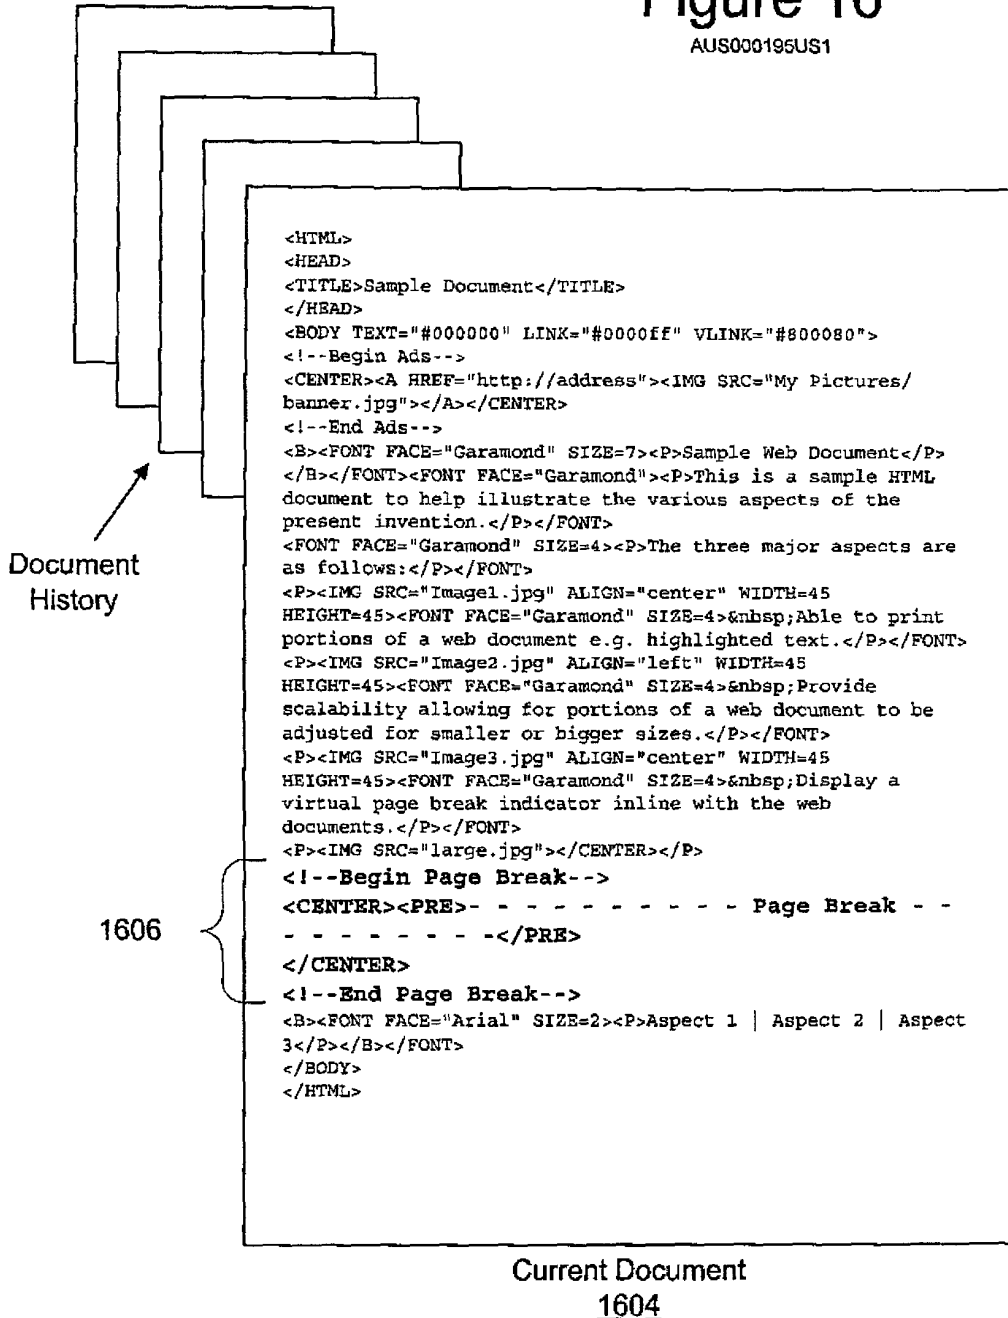
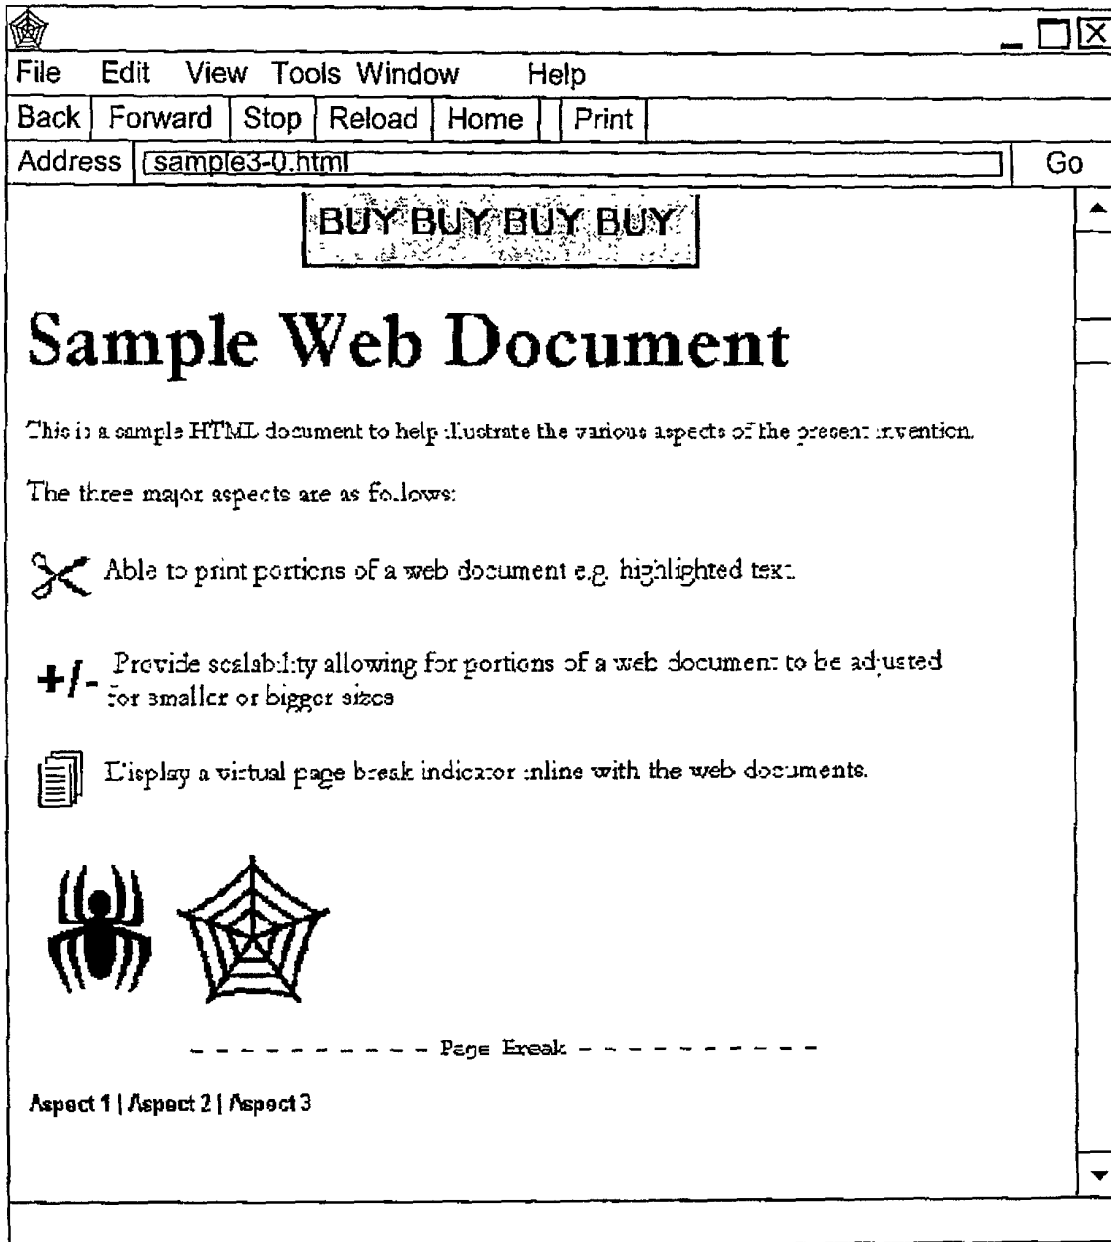


Figure 17

AUS000195US1



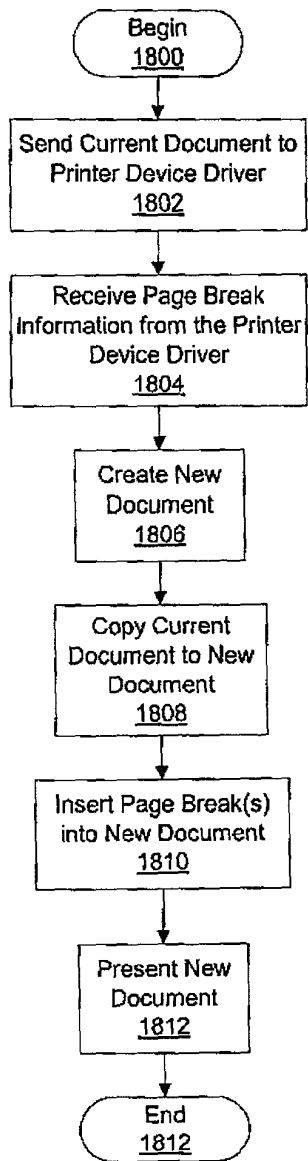


Figure 18A
AUS000195US1

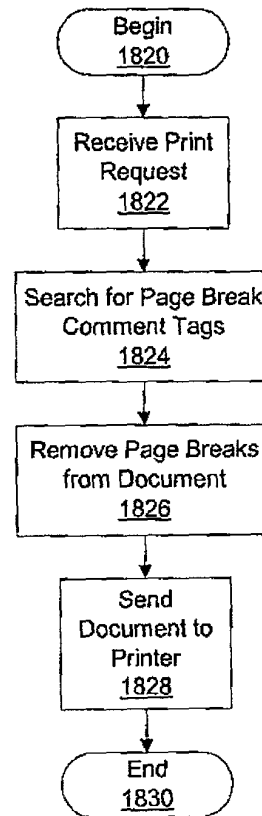


Figure 18B
AUS000195US1

**DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND SYSTEM FOR INCORPORATION OF GRAPHICAL PRINT TECHNIQUES IN A WEB BROWSER

the specification of which (check one)

X is attached hereto.

___ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed
_____ (Number)	_____ (Country)	_____ (Day/Month/Year)	___ Yes___ No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial #)	_____ (Filing Date)	_____ (Status)
---------------------------------	------------------------	-------------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; James H. Barksdale, Jr., Reg. No. 24,091; Casimer K. Salys, Reg. No. 28,900; Robert M. Carwell, Reg. No. 28,499; Douglas H. Lefevre, Reg. No. 26,193; Jeffrey S. LaBaw, Reg. No. 31,633; David A. Mims, Jr., Reg. No. 32,708; Volel Emile, Reg. No. 39,969; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; Mark E. McBurney, Reg. No. 33,114; Duke W. Yee, Reg. No. 34,285; Colin P. Cahoon, Reg. No. 38,836; Rudolph J. Buchel, Reg. No. 43,448; Stephen R. Loe, Reg. No. 43,757; Stephen J. Walder, Reg. No. 41,534; Charles D. Stepps, Jr., Reg. No. 45,880; and Stephen R. Tkacs, Reg. No. P-46,430.

Send correspondence to: Duke W. Yee, Carstens, Yee & Cahoon, LLP, P.O. Box 802334, Dallas, Texas 75380 and direct all telephone calls to Duke W. Yee, (972) 367-2001

FULL NAME OF SOLE OR FIRST INVENTOR: Umesh ~~S.~~ Khatwani ^{GOPALDAS} ^{UK}
INVENTORS SIGNATURE: Umesh Khatwani DATE: MAY 18, 2000

RESIDENCE: 12504 Fallen Tower Lane
Austin, Texas 78753

CITIZENSHIP: United States

POST OFFICE ADDRESS: SAME AS ABOVE

FULL NAME OF SECOND INVENTOR: Theodore Jack London Shrader

INVENTORS SIGNATURE: Theodore Jack London Shrader DATE: May 18, 2000

RESIDENCE: 408 Explorer
Austin, Texas 78734

CITIZENSHIP: United States

POST OFFICE ADDRESS: SAME AS ABOVE